






Ironwood Electronics, Inc.

PO Box 21151 • St Paul, MN 55121 • (651) 452-8100 • Fax (651) 452-8400

PA-QFJ100SA-P-T-01 Map
Rev A, 7/30/91

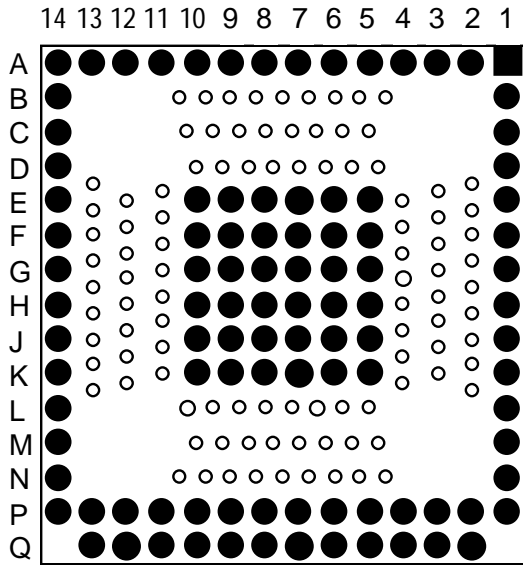

Bottom View-Base

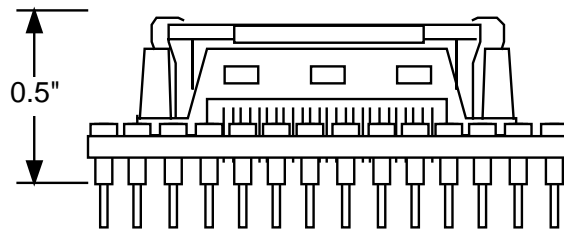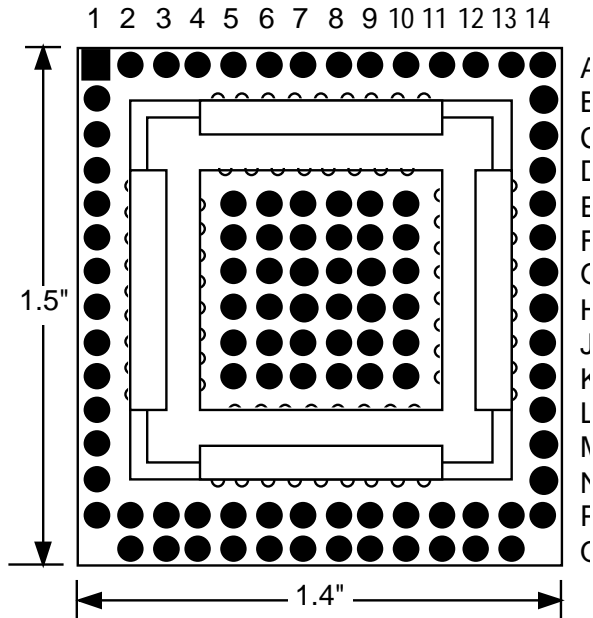

Top View-PQFP

QFP	Base	QFP	Base	QFP	Base	QFP	Base	QFP	Base	QFP	Base
1	B1	18	J6	35	Q7	52	L14	69	F14	86	E8
2	E1	19	J1	36	P3	53	K10	70	H8	87	F8
3	D1	20	K1	37	P7	54	M14	71	F10	88	A3
4	C1	21	K6	38	Q8	55	K14	72	A14	89	G7
5	H7	22	P1	39	P12	56	J10	73	E14	90	E7
6	F5	23	L1	40	P8	57	J14	74	D14	91	A7
7	F1	24	K5	41	Q9	58	K9	75	B14	92	F7
8	H6	25	N1	42	Q13	59	J9	76	A11	93	F6
9	G6	26	P4	43	P9	60	H14	77	A13	94	A6
10	G1	27	Q3	44	Q10	61	K8	78	E10	95	A2
11	J7	28	P5	45	P14	62	H10	79	A10	96	E6
12	G5	29	Q4	46	P10	63	C14	80	A12	97	A5
13	M1	30	P2	47	Q11	64	J8	81	F9	98	A1
14	K7	31	Q6	48	P13	65	G10	82	A9	99	E5
15	H5	32	Q5	49	P11	66	G14	83	E9	100	A4
16	H1	33	Q2	50	Q12	67	H9	84	G8		
17	J5	34	P6	51	N14	68	G9	85	A8		

Note: PQFP pins are sequentially mapped to alpha/numeric base pins.