


Top View

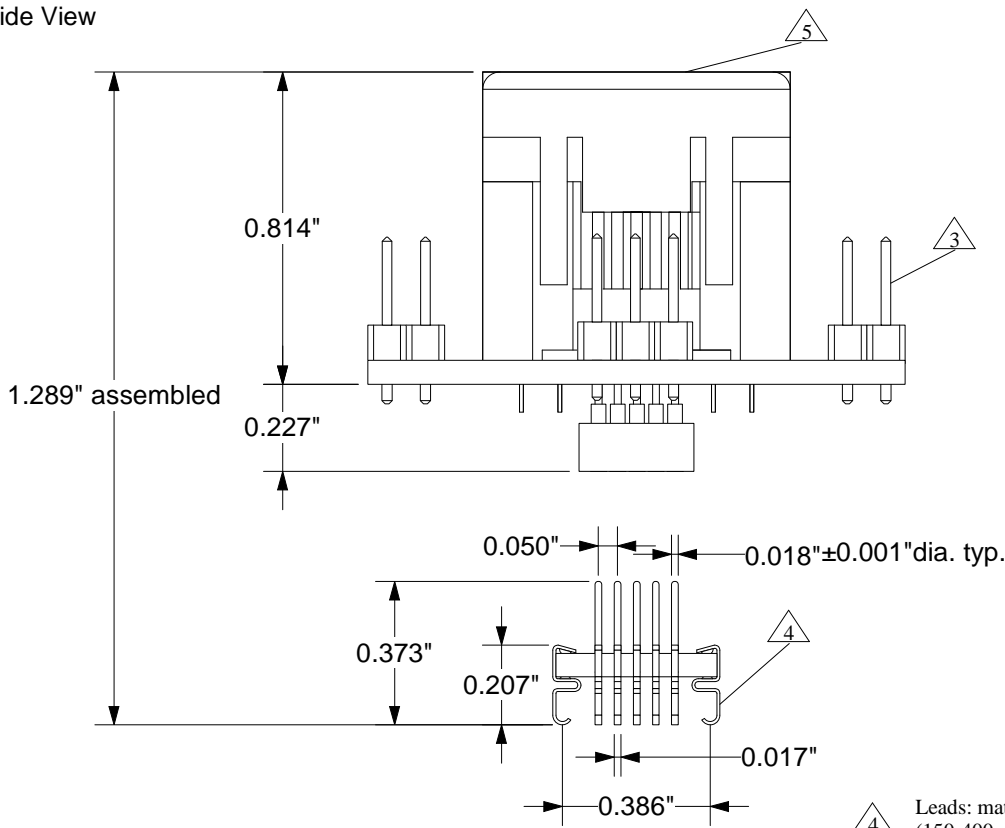


1.289" assembled

- △ 4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400 μ)
- △ 3 Test points: material- Phosphor Bronze; plating- Sn over 50 μ Ni. Gold flash on contact end.
- △ 5 Socket Contacts: Material- Phosphor Bronze, finish: 150 μ 93/7 SN/PB over 40 μ Ni.

Description: PLCC Carrier Adaptor
 2 piece pluggable adaptor, PLCC ZIF socket with test probes to surface mountable PLCC emulator foot.

All tolerances: ± 0.005 " (unless stated otherwise). Materials and specifications are subject to change without notice.

CA-PLCC20-Z-J-T-01 Drawing		Status: Released	Scale 2:1	Rev: D
 <p>© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing: M Tully		Date: 8/18/94	
	File: CA-PLCC20-Z-J-T-01 Dwg		Modified: 12/6/99	