


Top View

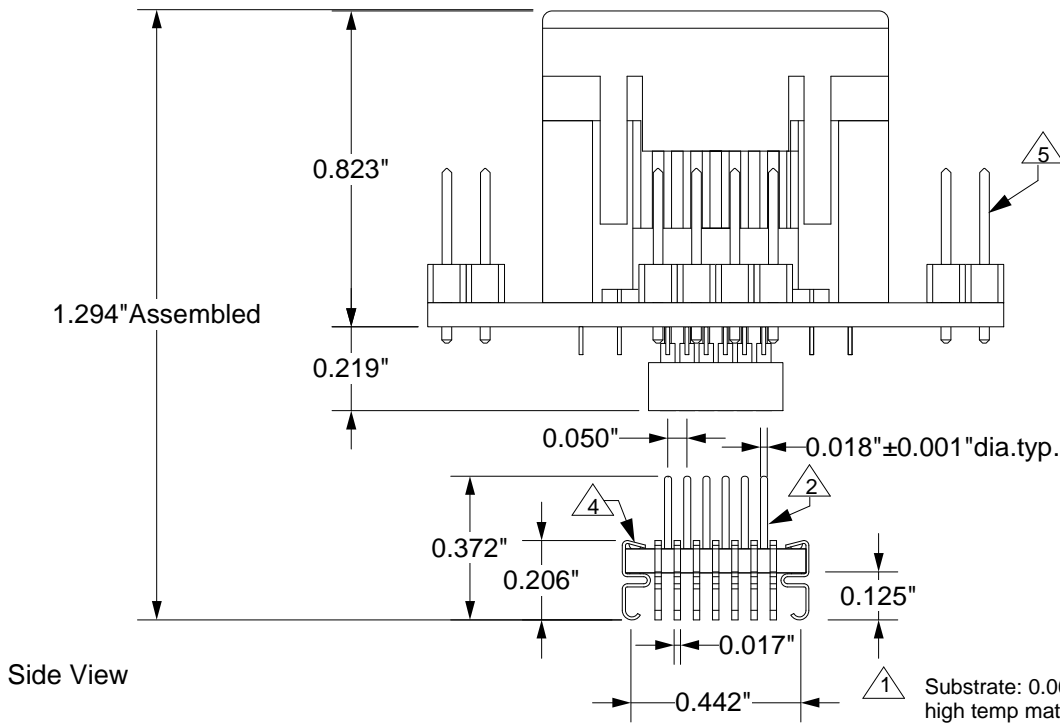

Side View

- ① Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. RoHS HASL plating.
- ② Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- ④ Leads: material- BeCu Alloy 194; plating- 80/20 SnPb.
- ⑤ Test points: material- Phosphor Bronze; plating- Sn over 50µ" Ni. Gold flash on contact end.

Description: Carrier adaptor;
 2 piece pluggable adaptor, PLCC ZIF socket with test probes to surface mountable PLCC emulator foot.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

CA-PLCC028-Z-J-T-01 DRAWING	Status: Released	Scale: 2:1	Rev: E
 © 1994 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com	Drawing: M. Lund		Date: 8/17/94
	File: PCA-PLCC028-Z-J-T-01 DWG		Modified: 9/27/11