



Top View

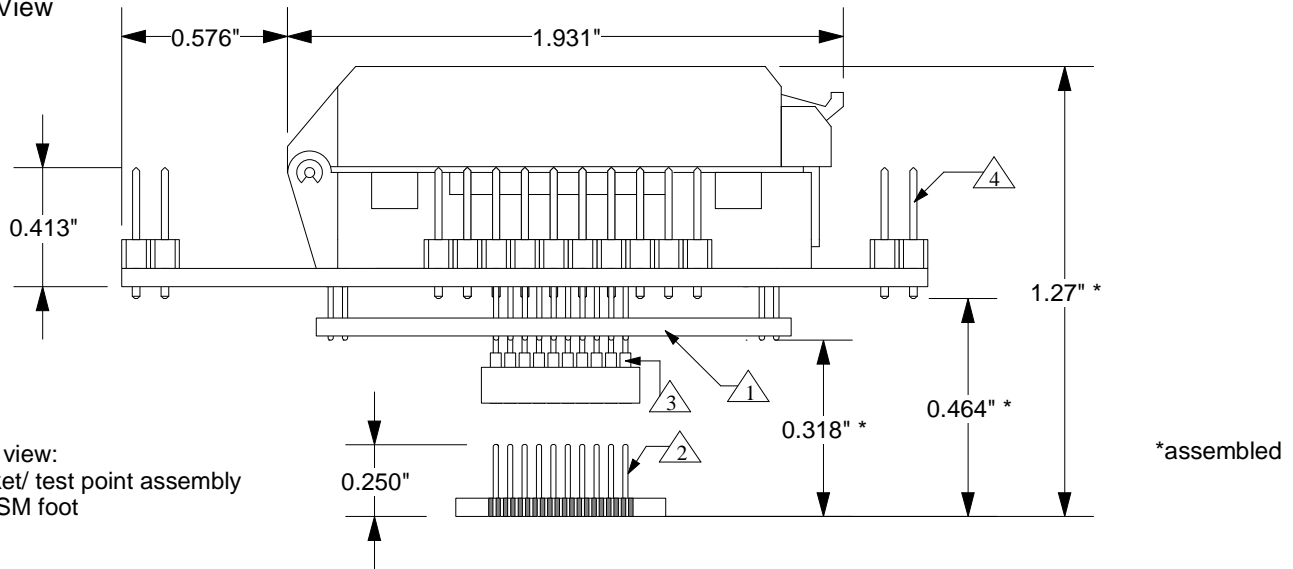

Side view:
Socket/ test point assembly
and SM foot

Ironwood Part #	Tip to Tip	
	X	Y
CA-QFE100RA-L-Z-T-01	19.6	25.6
CA-QFE100RB-L-Z-T-01	17.2	23.2
CA-QFE100RC-L-Z-T-01	17.9	23.9

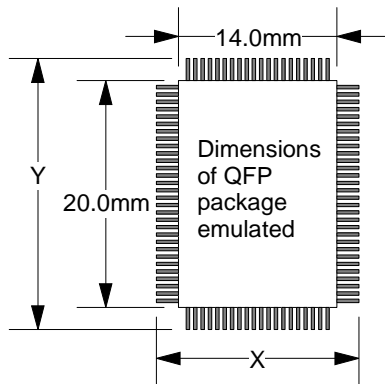


- ① Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- ② Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- ③ Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.).
- ④ Test points: material- Phosphor Bronze; plating- Sn over 50µ" Ni. Gold flash on contact end.

Description: Carrier Adaptor

100 position (0.65mm pitch) QFP Zero Insertion Force socket with test points to 100 position surface mountable QFP emulator foot. The 2 piece adaptor interconnects via gold plated (0.05" center) Mini-grid socket interface.

All tolerances are ±0.005" unless otherwise specified. Materials and specifications are subject to change without notice.

CA-QFE100R(A,B,C)-L-Z-T-01 Drawing		Status: released	Scale: 4:3	Rev: F
 <p>© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing by: G. Nelson		Date: 8/8/94	
	File: CA-QFE100RA-L-Z-T-01 Dwg		Modified: 9/1/98	