



Top View

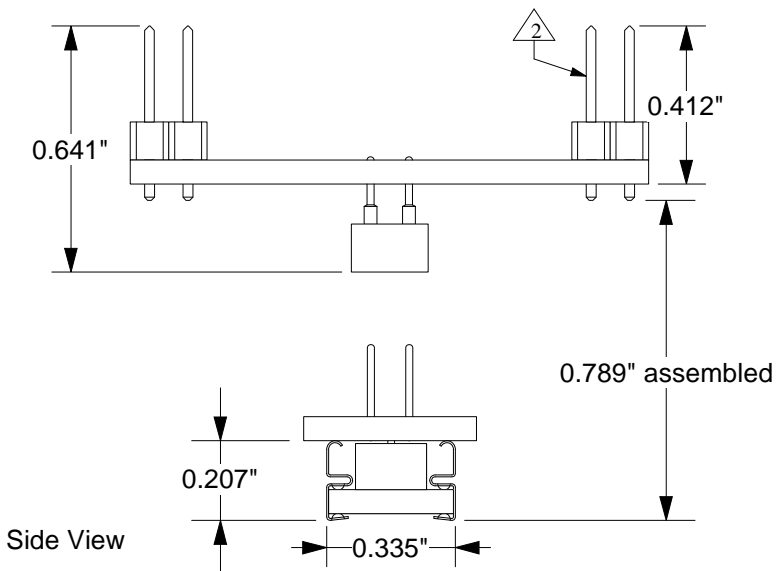

Side View

- △1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- △3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Nil (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)
- △4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")
- △5 Test points: material- Phosphor Bronze; plating- Sn over 50µ" Ni. Gold flash on contact end.

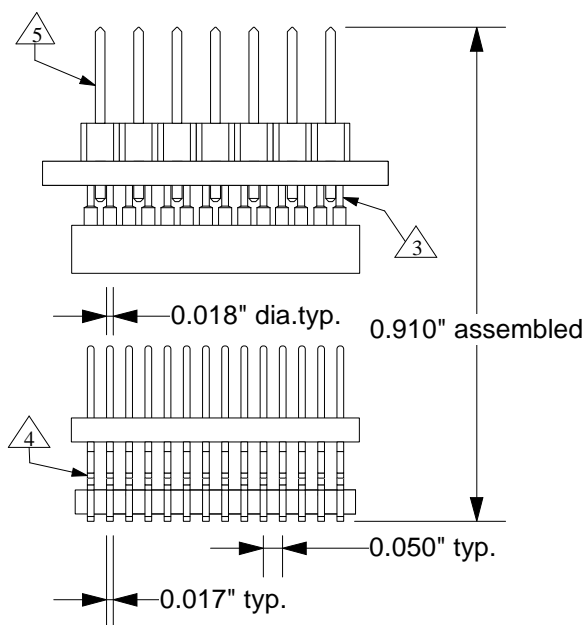


End View

Description: CARRIER ADAPTOR:

28 position land pattern converting to 28 position J leaded surface mount foot. Top interface accommodates ZIF socket.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

	CA-SOJ28A-N-P-T-01 Drawing	Status: released	Scale: 2:1	Rev: C	
	© 1997 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing by: M Tully	Date: 4/22/97		
		File: CA-SOJ28A-N-P-T-01 Dwg	Modified: 5/5/98		