


- △ 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating

- △ 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).


- △ 3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)

- △ 4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")

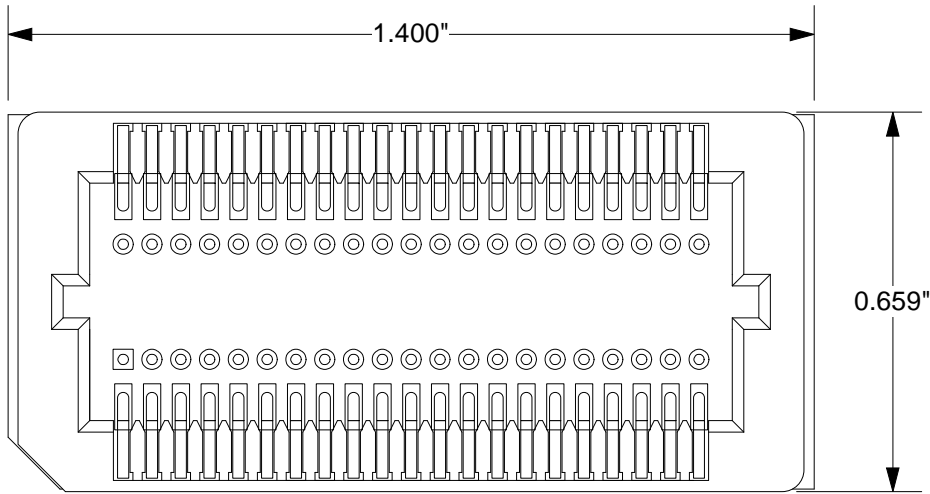

Top View

End View

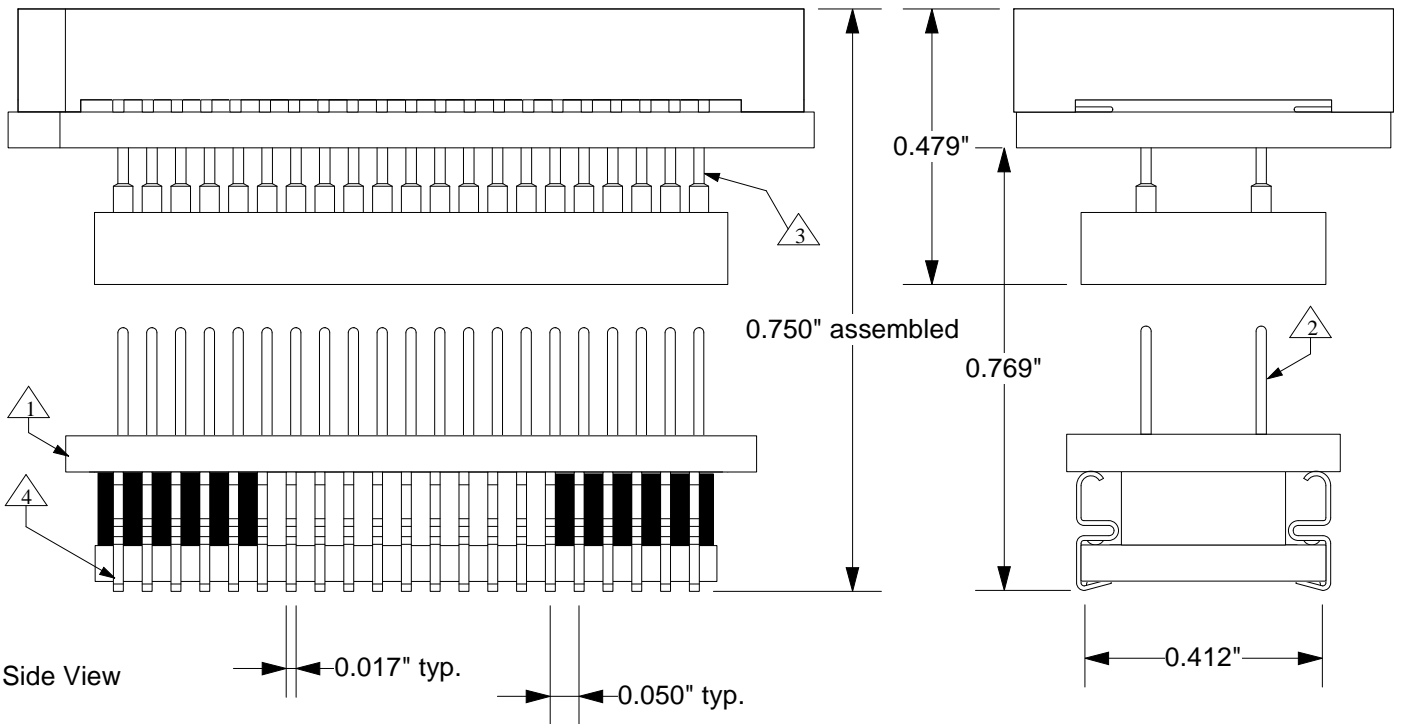


Side View

Description: CARRIER ADAPTOR

A two piece pluggable device converting from a 42 position socket to a 42 position pluggable foot. Corresponds to Ironwood SOJ42A Spec.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

	CA-SOJ42A-D-P-01 Drawing		Status: released	Scale: 3:1	Rev: B	
	© 1996 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com			Drawing by: M Lund		Date: 1/11/96
				File: CA-SOJ42A-D-P-01 Dwg		Modified: 3/17/98