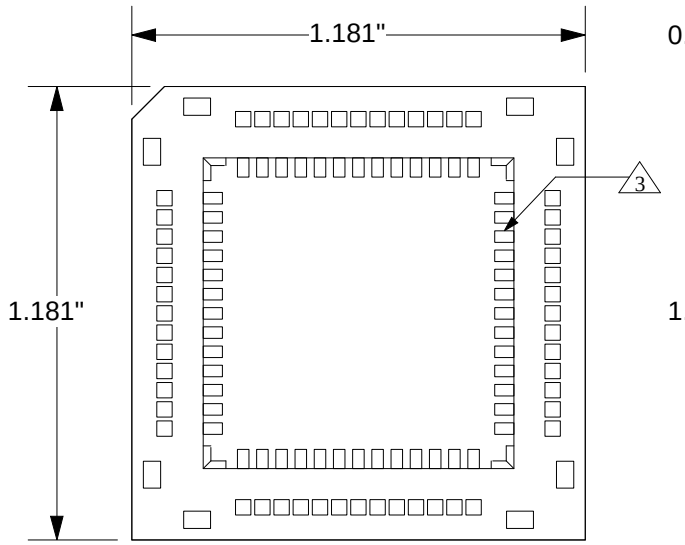

Top View

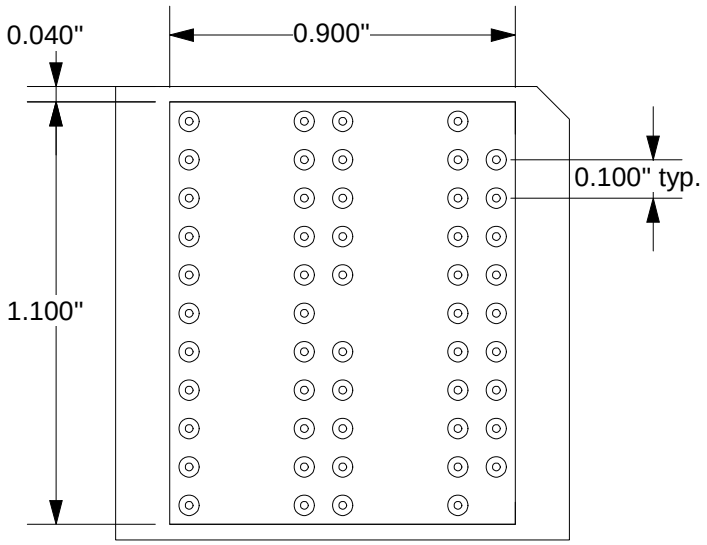

Bottom View
(only male pins shown for drawing clarity)

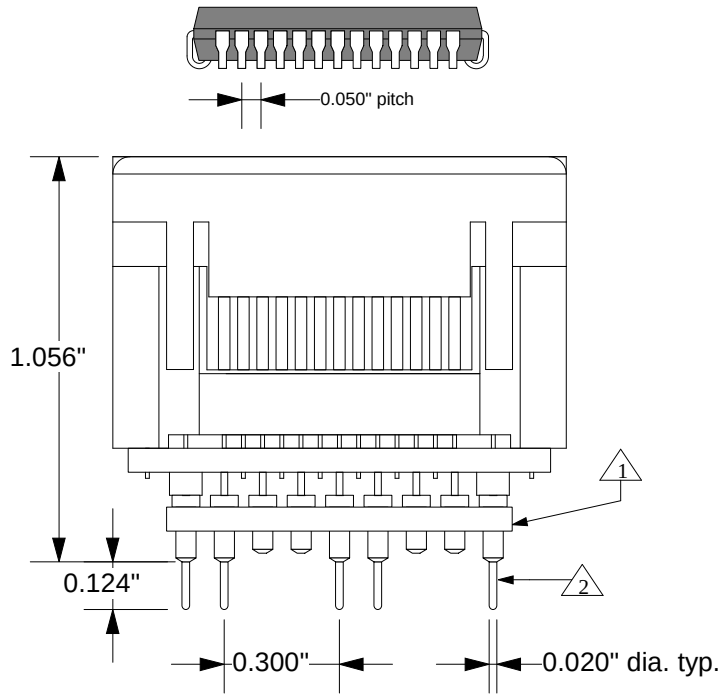

Side View

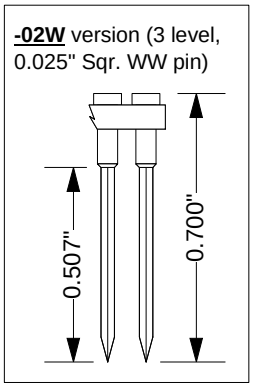

1. Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating

2. Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Nil (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)

3. Socket Contacts: material- Phosphor Bronze, finish: 150µ" 93/7 SN/PB over 40µ" Ni.

Description: PLCC Prototyping adapter
52 position PLCC Zero Insertion Force (ZIF) socket (0.050" pitch) to type C prototyping panel base terminal pins (0.100" centers). Add "W" to part number for optional wire wrap base.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

PA-PLCC52-02-Z(W) Drawing	Status: Released	Scale 2:1	Rev: B
© 1998 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing: T. Johnson	Date: 1/18/96	
	File: PA-PLCC052-02-Z Dwg	Modified: 6/25/98	