



Top View

Bottom View
(only male pins shown for drawing clarity)

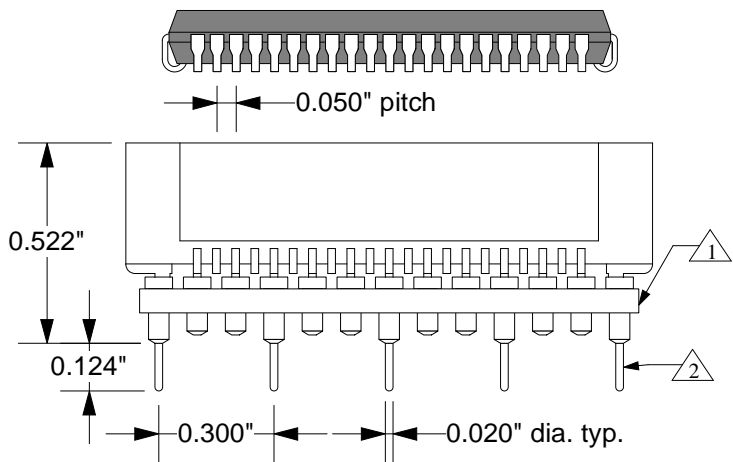

Side View

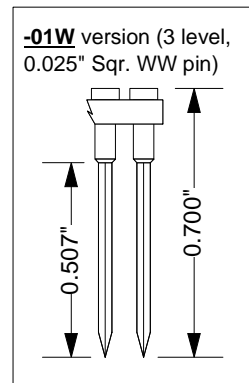


- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- 2 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Nil (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)
- 3 Socket Contacts: material- Phosphor Bronze, finish: 150µ" 93/7 SN/PB over 40µ" Ni.

Description: PLCC Prototyping adapter

84 position PLCC production socket (0.050" pitch) to type A prototyping panel base terminal pins (0.100" centers, 0.300" column spacing). Add "W" to part number for optional wire wrap base.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

PA-PLCC84-01(W) Drawing		Status: Released	Scale 2:1	Rev: D
	© 1989 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com		Drawing: P. Jasmin Date: 1/3/89	
			File: PA-PLCC084-01 Dwg Modified: 6/30/98	