



Top View

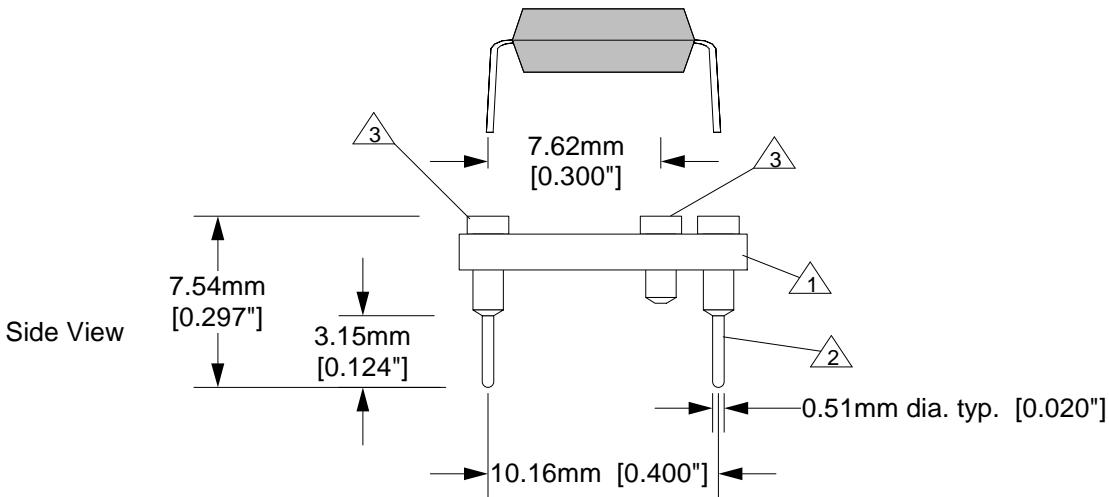

Side View

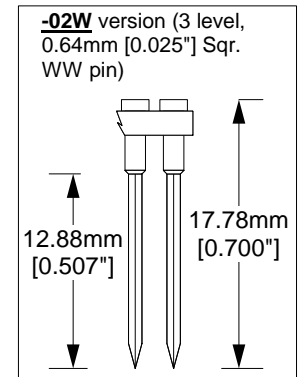


- △1 Substrate: 1.59mm ±0.18mm [0.0625" ±0.007"] FR4/G10 or equivalent high temp material. 17µm [1/2 oz.] Cu clad. Lead Free HASL (RoHS) SMOBC plating..
- △2 Pins: material- Brass Alloy 360 1/2 hard; finish- 0.25µm [10µ"] Au over 1.27µm [50µ"] Ni (min.).
- △3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 0.25µm [10µ"] Au over 1.27µm [50µ"] Ni (min.). Contact material- BeCu; finish 0.25µm [10µ"] Au over 2.54µm [100µ"] Ni (min. ).

**Description: Package Converter**

22 position 7.62mm [0.300"] female DIP to 10.16mm [0.400"] male DIP adaptor.

Add "W" to end of part number to order wire wrap version.

Tolerances: diameters ±0.03mm [±0.001"], PCB perimeters ±0.13mm [±0.005"], PCB thicknesses ±0.18mm [±0.007"], pitches (from true position) ±0.08mm [±0.003"], all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

<b>PC-DIP/DIP22-02 Drawing</b>		Status: Released	Scale 3:1	Rev: D
 <p>© 1993 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com</p>	Drawing: P. Jasmin		Date: 1/13/93	
	File: PC-DIP/DIP22-02 Dwg		Modified: 9/5/13	