



SMT Version

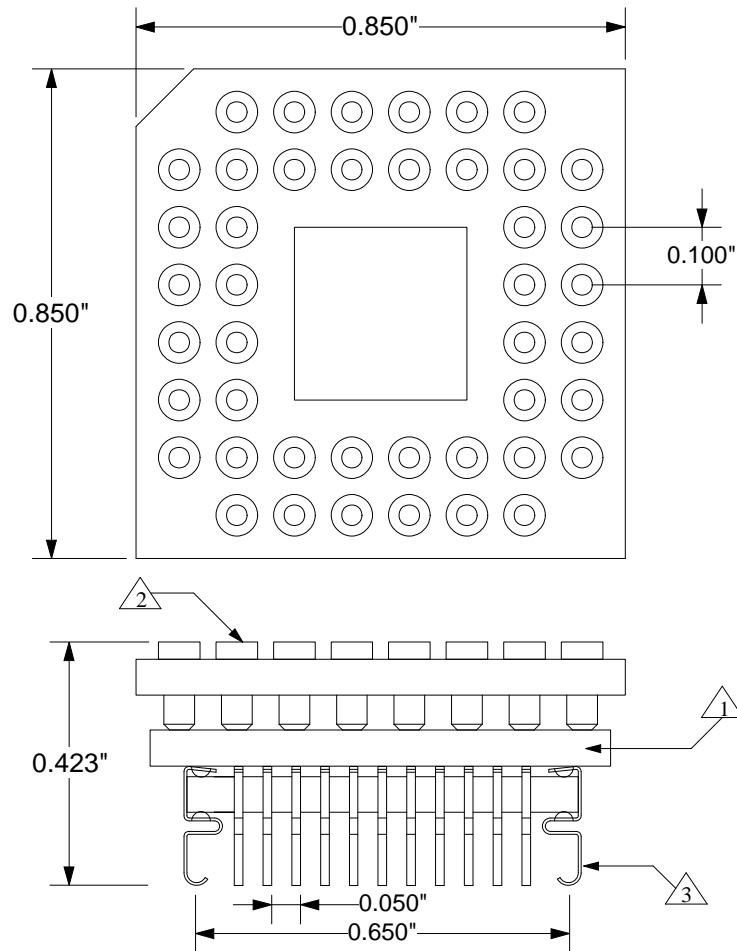

- △1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △2 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)
- △3 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")

Description: Package Converter: 44 position PGA to 44 position PLCC surface-mountable foot.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

PC-PGA/PLCC044-02 Drawing		Status: released	Scale 3:1	Rev: C
 <p>© 1993 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing: C. Hautman		Date: 11/22/93	
	File: PC-PGA/PLCC044-02 Dwg		Modified: 8/17/99, MT	