



Top View

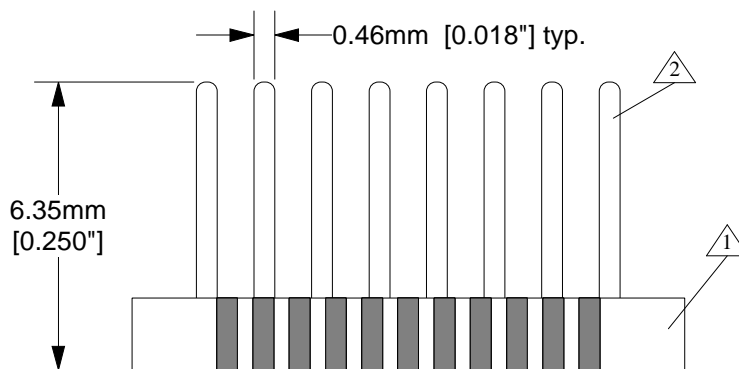

Side View

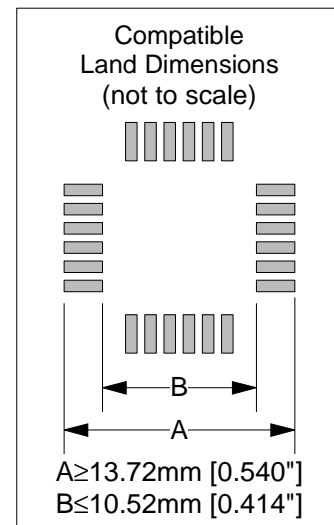


1 Substrate: 1.59mm ±0.18mm [0.0625" ±0.007"]
FR4/G10 or equivalent high temp material. 17µm [1/2 oz.] Cu clad. SnPb plating.

2 Pins: material- Brass Alloy 360 1/2 hard; finish- 0.25µm [10µ"] Au over 1.27µm [50µ"] Ni (min.).

Description: Surface-mount Foot (SF), QFP
44 position QFP surface mount foot. (lead less) with terminal pins.

Tolerances: diameters ±0.03mm [±0.001"], PCB perimeters ±0.13mm [±0.005"], PCB thicknesses ±0.18mm [±0.007"], pitches (from true position) ±0.08mm [±0.003"], all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

SF-QFE44SA-L-01 Drawing		Status: Released	Scale: 6:1	Rev: G
 <p>© 1993 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing: P. Jasmin		Date: 9/23/93	
	File: SF-QFE44SA-L-01 Dwg		Modified: 10/16/01	