
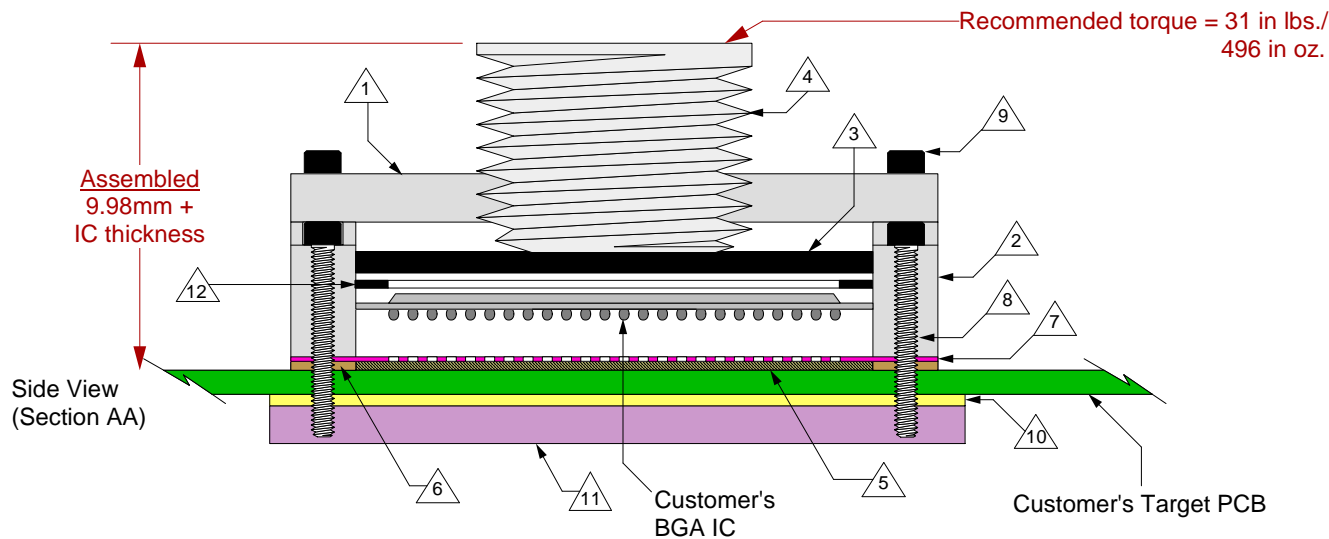


# GHz BGA Socket - Direct mount, solderless

## Features

- Directly mounts to target PCB (needs tooling holes) with hardware.
- High speed, reliable Elastomer connection
- Minimum real estate required
- Compression plate distributes forces evenly
- Ball guide prevents over compression of elastomer
- Easily removable swivel socket lid

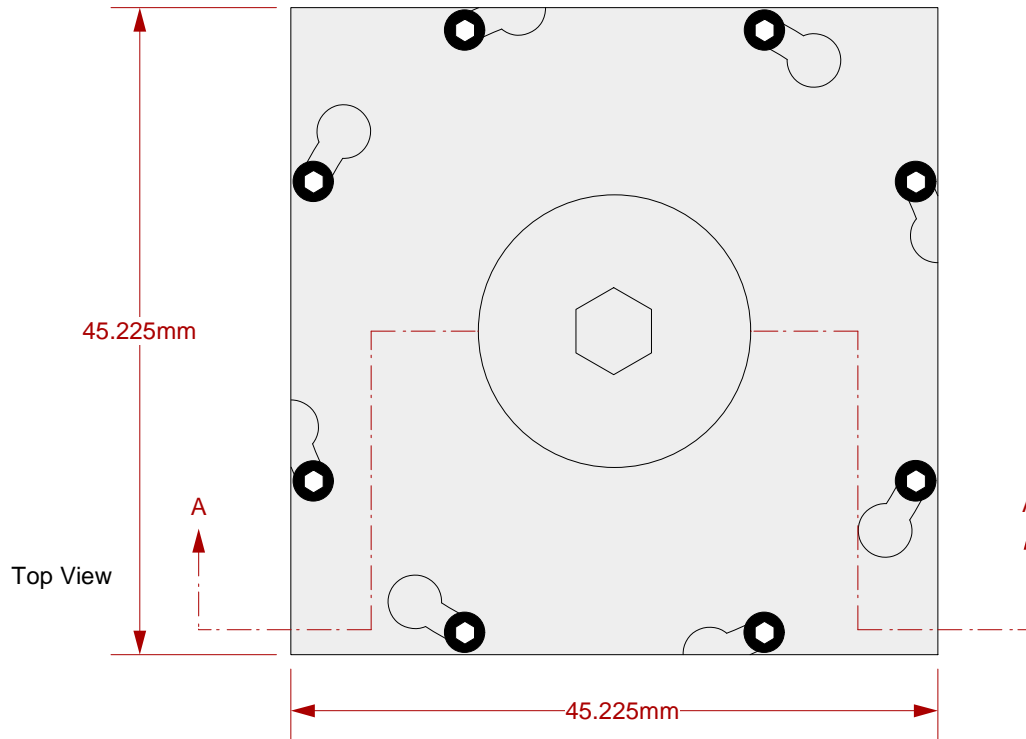

- |    |  |
|----|--|
| 1  | Socket Lid: Black anodized Aluminum.<br>Thickness = 2.5mm.   |
| 2  | Socket base: Black anodized Aluminum.<br>Thickness = 7.5mm.  |
| 3  | Compression Plate: Black anodized Aluminum.<br>Thickness = 4.0mm.  |
| 4  | Compression screw: Clear anodized Aluminum.<br>Thickness = 5mm, Hex socket = 5mm.  |
| 5  | Elastomer: 40 micron dia gold plated brass filaments arranged symmetrically in a silicone rubber (63.5 degree angle).<br>Thickness = 0.75mm. |
| 6  | Elastomer Guide: Cirflex or equivalent.<br>Thickness = 0.725mm.  |
| 7  | Ball Guide: Kapton polyimide.  |
| 8  | Socket base screw: Socket head cap, alloy steel with black oxide finish, 0-80 fine thread, 12.7mm long.                                      |
| 9  | Socket lid screw: Shoulder screw, 18-8 SS, 0-80 fine thread.   |
| 10 | Insulation Plate: FR4/G10, 1.59mm thick.   |
| 11 | Backing Plate: Black anodized Aluminum.<br>Thickness = 6.35mm.   |
| 12 | IC Frame: Ultem 1000.  |

## SG-BGA-6174 Drawing

Status: Released

Scale: -

Rev: B



© 2009 IRONWOOD ELECTRONICS, INC.  
11351 Rupp Drive, Suite 400, Burnsville, MN 55337  
Tele: (952) 229-8200  
www.ironwoodelectronics.com

Drawing: S.Natarajan

Date: 12/9/05


File: SG-BGA-6174 Dwg

Modified: 7/21/09, AE

All tolerances:  $\pm 0.125$ mm (unless stated otherwise). Materials and specifications are subject to change without notice.

Recommended PCB Layout  
Top View

**\*Note: BGA pattern is not symmetrical with respect to the mounting holes.**

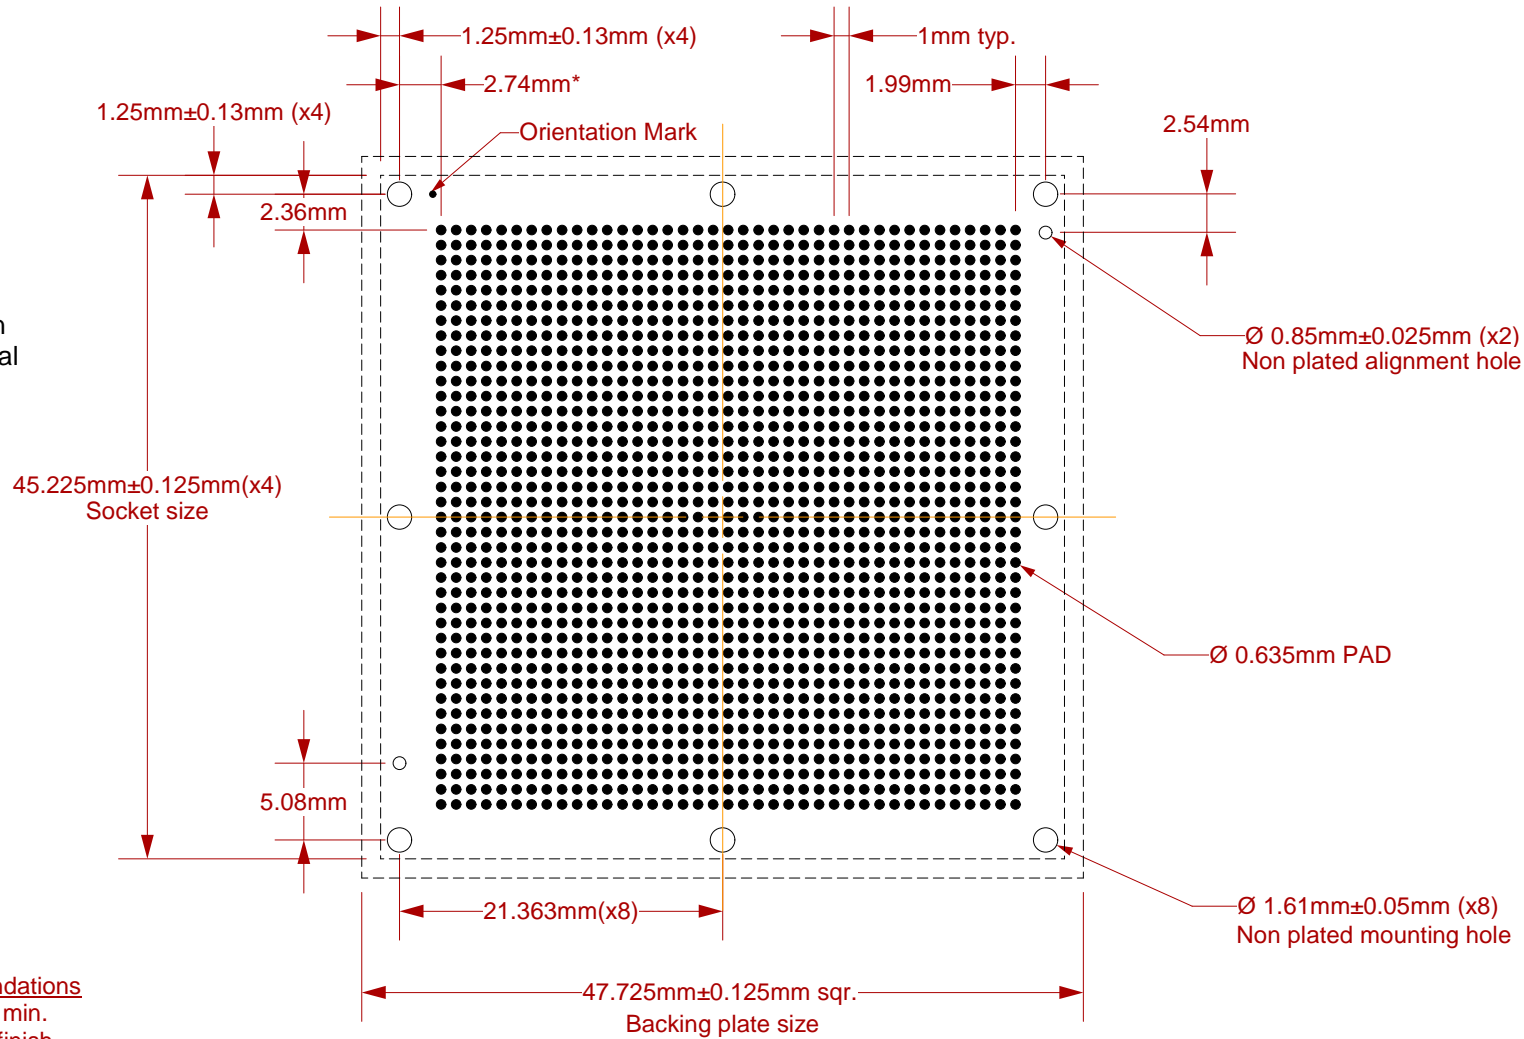


Note: Full BGA pattern shown. Please adjust pattern according to individual requirements.



Target PCB Recommendations

Total thickness: 2.4mm min.  
Plating: Gold or Solder finish  
PCB Pad height: Same or higher than solder mask


NOTE: Steel backing plate may be required based on end user's application

Recommended PCB Layout Tolerances:  $\pm 0.025\text{mm}$  [ $\pm 0.001"$ ] unless stated otherwise.

 <p>© 2009 IRONWOOD ELECTRONICS, INC. 11351 Rupp Drive, Suite 400, Burnsville, MN 55337 Tele: (952) 229-8200 www.ironwoodelectronics.com</p>	<p><b>SG-BGA-6174 Drawing</b></p>	Status: Released	Scale: 2:1	Rev: B
	Drawing: S.Natarajan		Date: 12/9/05	
	File: SG-BGA-6174 Dwg		Modified: 7/21/09, AE	

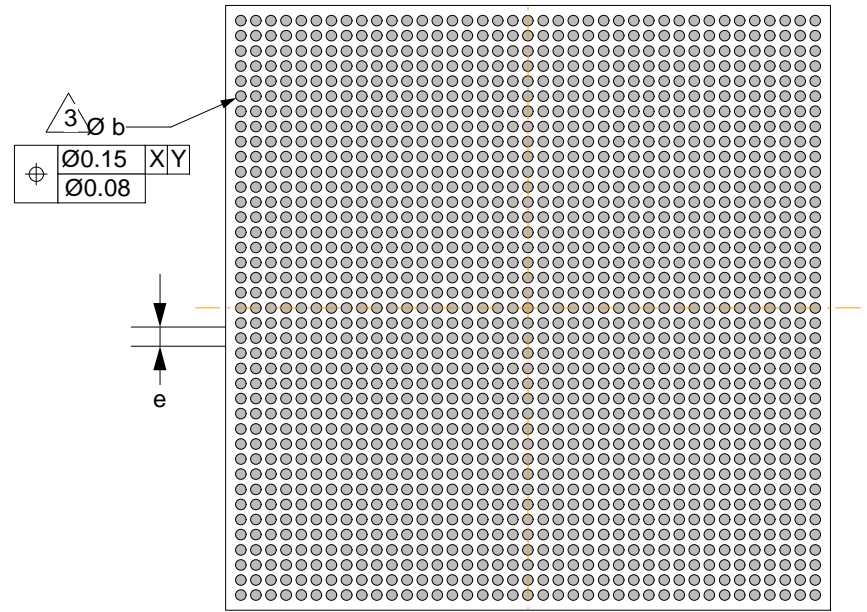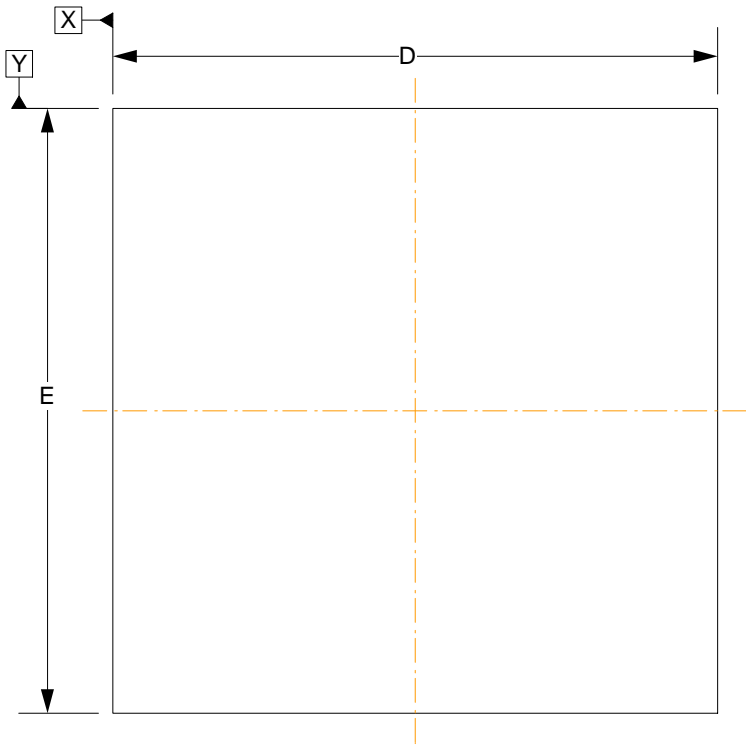


Bottom View Array: 39x39

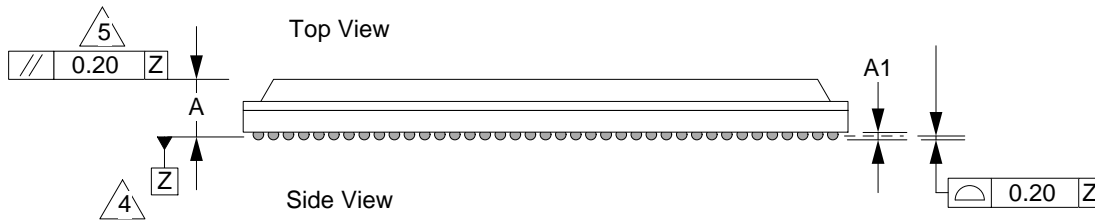

1. Dimensions are in millimeters.
  2. Interpret dimensions and tolerances per ASME Y14.5M-1994.
- Dimension b is measured at the maximum solder ball diameter, parallel to datum plane Z.
3. Datum Z (seating plane) is defined by the spherical crowns of the solder balls.
  4. Parallelism measurement shall exclude any effect of mark on top surface of package.

DIM	MIN	MAX
A		3.25
A1	0.4	0.6
b		0.70
D	40.0 BSC	
E	40.0 BSC	
e	1.0 BSC	

Array: 39x39

 <p>© 2009 IRONWOOD ELECTRONICS, INC. 11351 Rupp Drive, Suite 400, Burnsville, MN 55337 Tele: (952) 229-8200 www.ironwoodelectronics.com</p>	<p><b>SG-BGA-6174 Drawing</b></p>	<p>Status: Released</p>	<p>Scale: 2:1</p>	<p>Rev: B</p>
	<p>Drawing: S.Natarajan</p>	<p>Date: 12/9/05</p>		<p>Modified: 7/21/09, AE</p>
		<p>File: SG-BGA-6174 Dwg</p>		

