

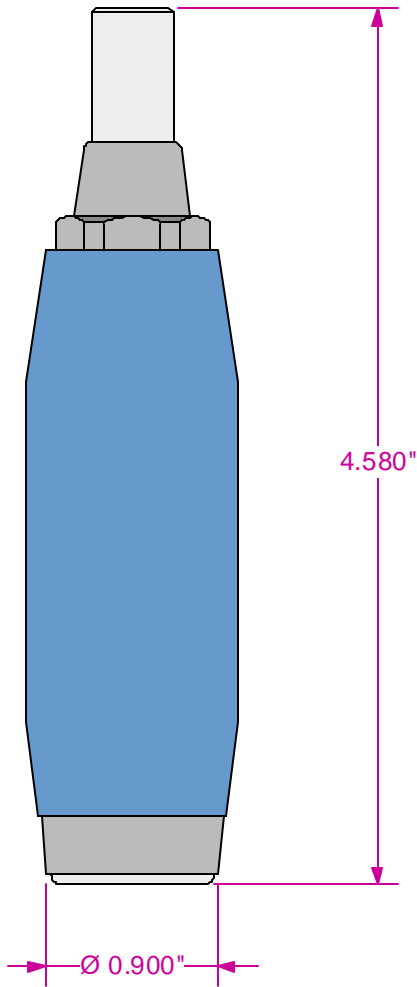




Side View

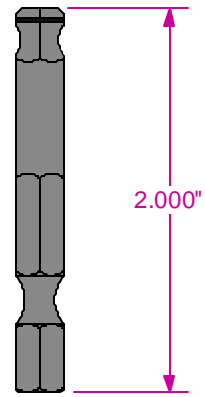


Bottom View



**Description:** Tool (TL), Torquedriver

Adjustable torquescrewdriver, Torque Range: 48-240 in. oz. [3-15 in. lb.], 1/4" hex female shank receiver, includes 5mm ball point bit and 3mm hex bit.

|   |                                   |  |                                 |            |                  |
|---|-----------------------------------|--|---------------------------------|------------|------------------|
|  <p>© 2002 IRONWOOD ELECTRONICS, INC.<br/>PO BOX 21151 ST. PAUL, MN 55121<br/>Tele: (651) 452-8100<br/>www.ironwoodelectronics.com</p> | <b>TL-Torquedriver-02 Drawing</b> |  | Status: Released                | Scale: 2:1 | Rev: C           |
|   |                                   |  | Drawing by: E Smolentseva       |            | Date: 10/08/02   |
|   |                                   |  | File:TL-Torquedriver-02 Dwg.mcd |            | Modified: 4/8/04 |