


Top View

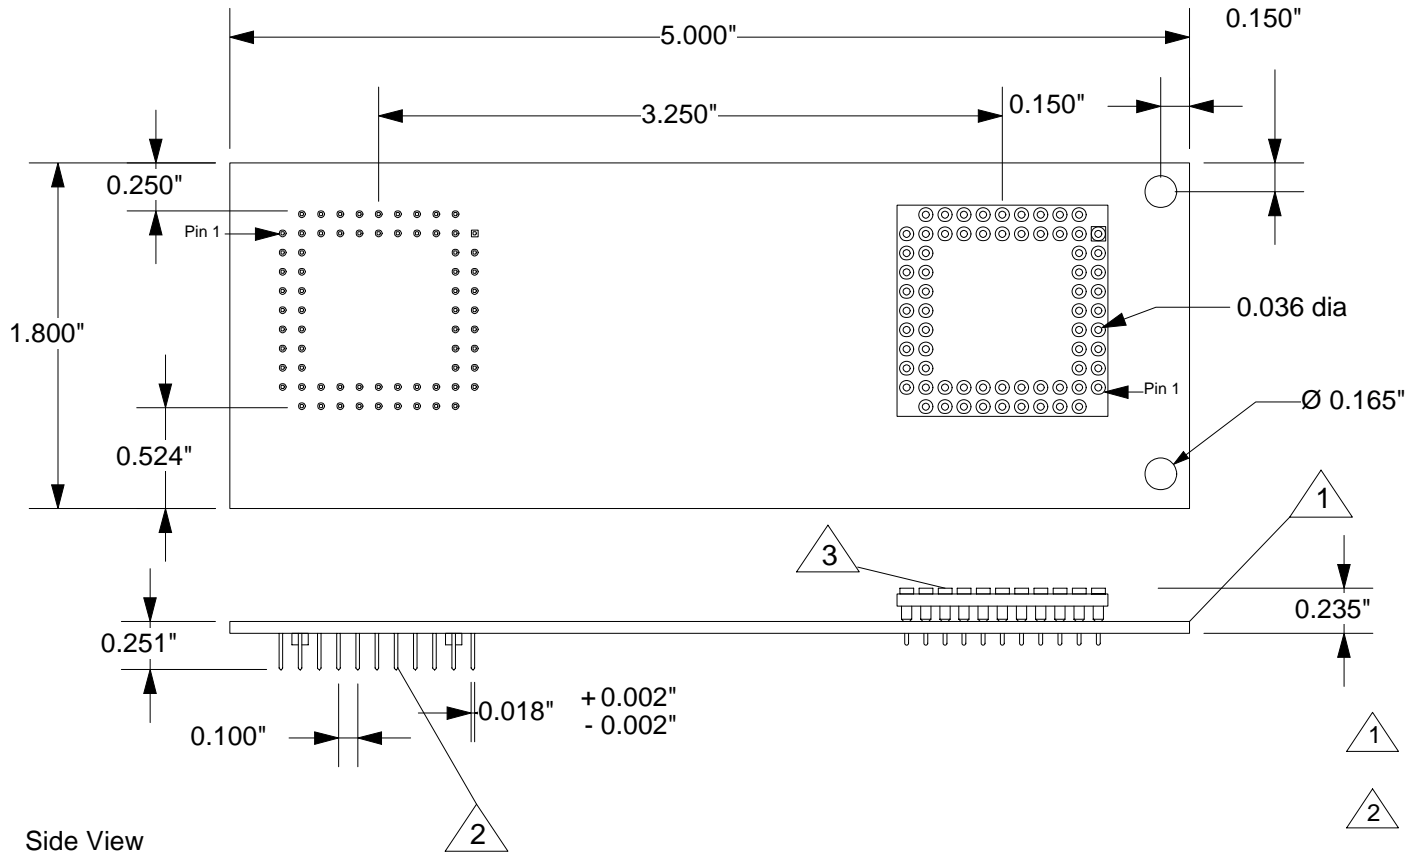


- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material.
- 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- 3 Pins: shell material- Brass Alloy 360 1/2 hard; shell finish- 10µ" Au over 50µ" Nil (min.). Contact material- BeCu; contact finish 10µ" Au over 100µ" Ni (min.).


Side View

Description: PGA Extender


68 position PGA female socket pins to 68 position PGA male terminal pins. Pin assignment 1:1 with ground plane for Intel 87C196KC. The part is rotated 180 degrees. Note the pin 1 location on the drawing.

	<b>XT-PGA11/68A-01 Drawing</b>	Status: Released	Scale: 2:1	Rev: A
	© 1997 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing: Ila Pal		Date: 02/27/1997
		File: XT-PGA11/68A-01 Dwg	Page 1 of 2	

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

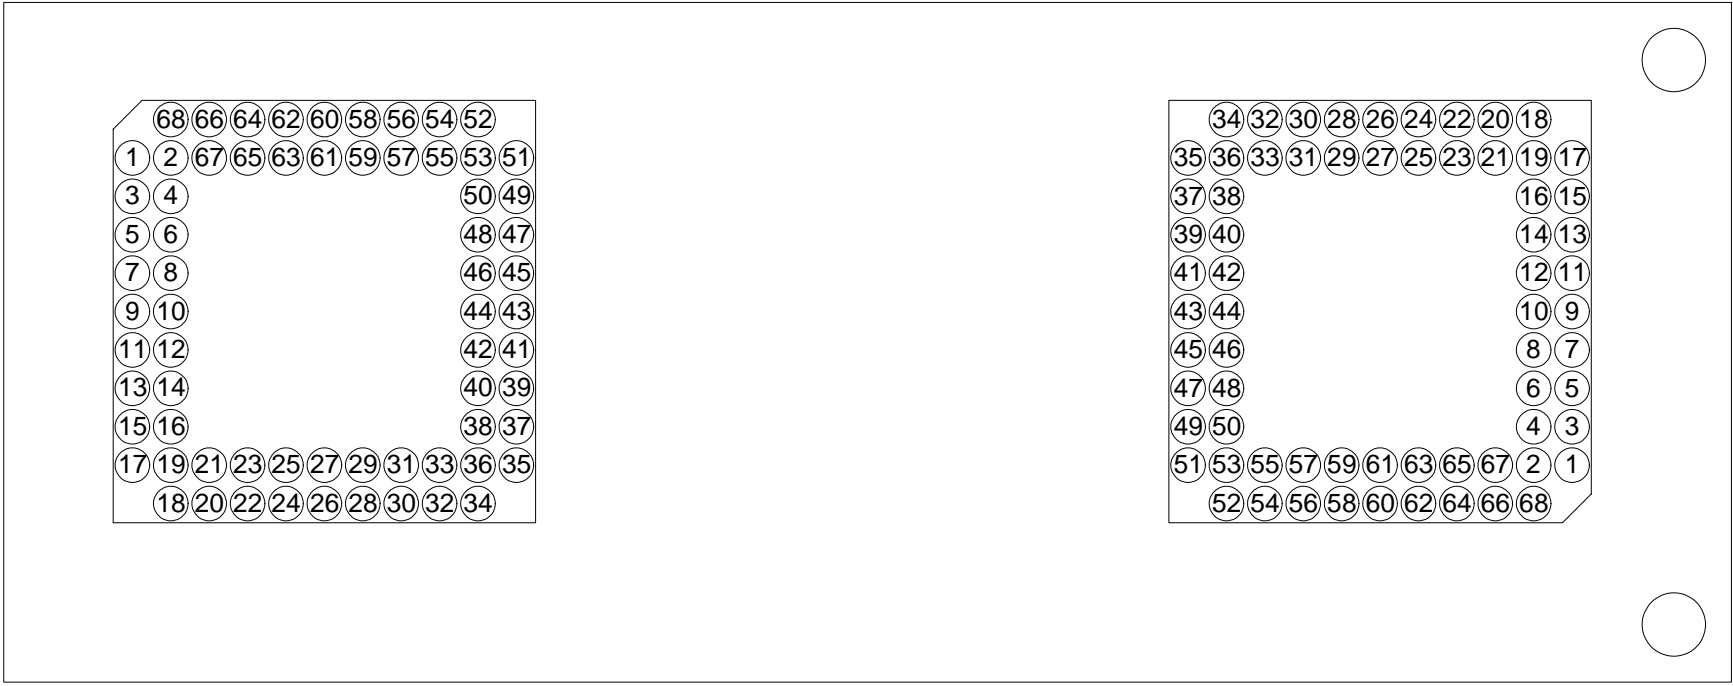

Top View

<b>XT-PGA11/68A-01 Map</b>	Status: Released	Scale: 2:1	Rev: A
 <p>© 1997 IRONWOOD ELECTRONICS, INC.          PO BOX 21151 ST. PAUL, MN 55121          Tele: (651) 452-8100  <a href="http://www.ironwoodelectronics.com">www.ironwoodelectronics.com</a></p>	Drawing: Ila Pal		Date: 02/27/1997
	File: XT-PGA11/68A-01 Dwg	Page 2 of 2	