



Top View

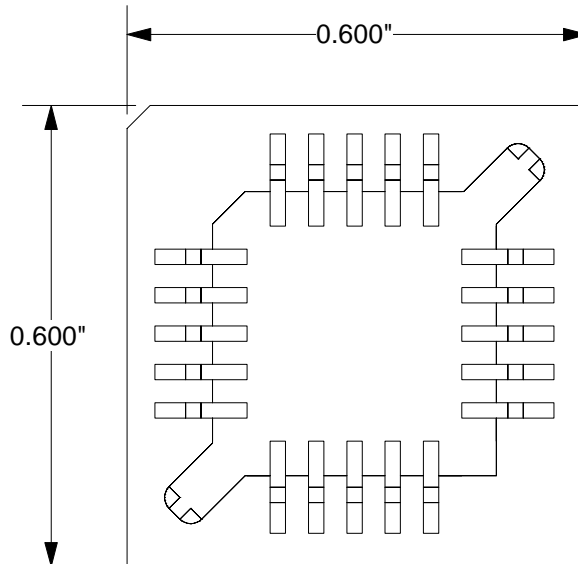

Side View

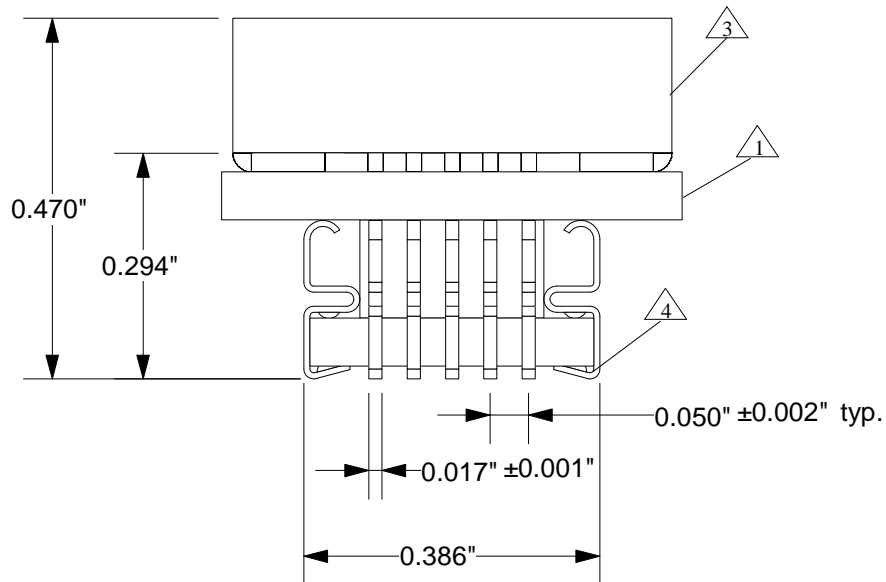


- ① Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- ④ Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400μ")
- ③ Socket Contacts: Material- Phosphor Bronze, finish: 150μ" 93/7 SN/PB over 40μ" Ni.

Description: EXTENDER:

20 position PLCC SMT production socket to 20 position PLCC socket plug. A vertical height extension is realized as well as a renewable device socket. Pin assignment is 1:1.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

<b>XT-PLCC20-01 Drawing</b>		Status: Released	Scale 4:1	Rev: A
	© 1999 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com		Date: 12/23/99	
			Modified:	