



Top View

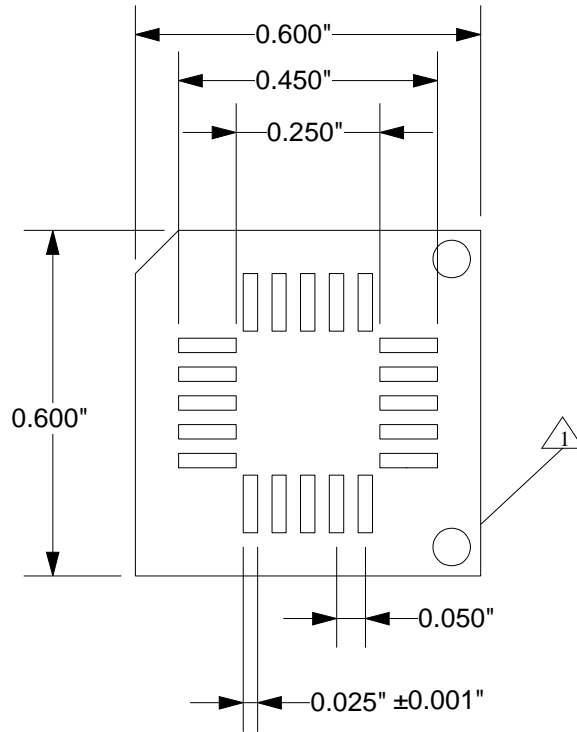

Side View

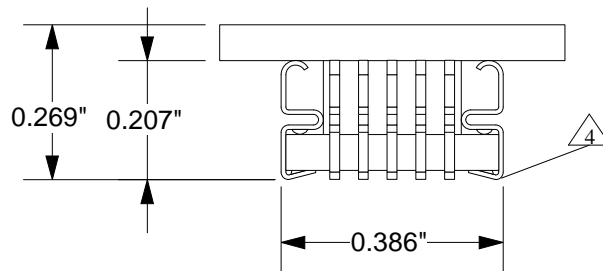

△ 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating


△ 4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")

Description: Extender ,XT

Adaptor extends the plcc production socket contacts to a 20 pin PLCC SMT land pattern.

Interconnect to PLCC socket contacts is made via a male PLCC emulator plug. Pin assignent; 1:1.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

XT-PLCC20-04 Drawing		Status: Released	Scale 3:1	Rev: B
 <p>© 1999 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing: P.M. Ilavarasan		Date: 5/25/95	
	File: XT-PLCC20-04 Dwg		Modified: 12/23/99	