



Top View

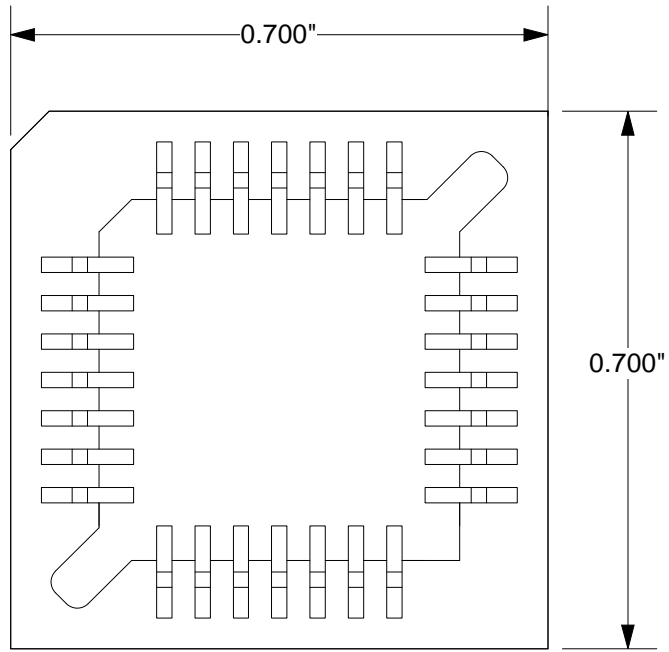

Side View

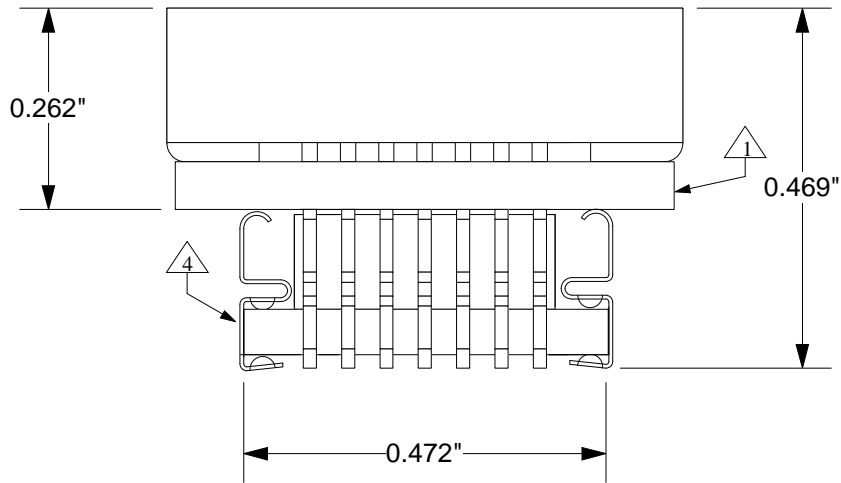


- △1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")

**Description:** EXTENDER:

28 position PLCC SMT production socket to 28 position PLCC socket plug. A vertical height extension is realized as well as a renewable device socket. Pin assignment is 1:1.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

<b>XT-PLCC28-01 Drawing</b>		Status: released	Scale: 4:1	Rev: A
	© 1997 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com		Drawing by: P. Jasmin Date: 4/14/97	
			File: XT-PLCC28-01 Dwg Modified: 4/22/98	