



Top View

Bottom View (only male pins shown for clarity)

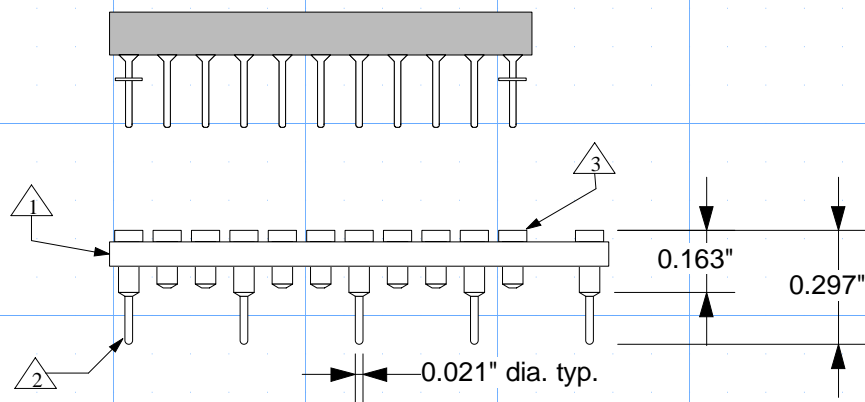

Side View

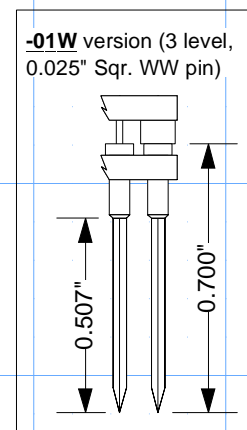


- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- 3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)

**Description:** PGA Prototyping Adapter

85 position PGA socket receptables (0.100" centers) to type A prototyping panel base terminal pins (0.100" centers, 0.300" between columns). PGA package depicted in side view not included. Add "W" to part number for optional wire wrap base.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

|   |   |                  |   |        |
|---|---|------------------|---|--------|
| <b>PA-PGA85-01(W) Drawing</b>   |   | Status: Released | Scale 2:1                                   | Rev: C |
|  | © 1988 IRONWOOD ELECTRONICS, INC.<br>PO BOX 21151 ST. PAUL, MN 55121<br>Tele: (651) 452-8100<br>www.ironwoodelectronics.com |                  | Drawing: P. Jasmir<br>Date: 10/24/88        |        |
|   |   |                  | File: PA-PGA085-01 Dwg<br>Modified: 5/28/98 |        |