




Top View

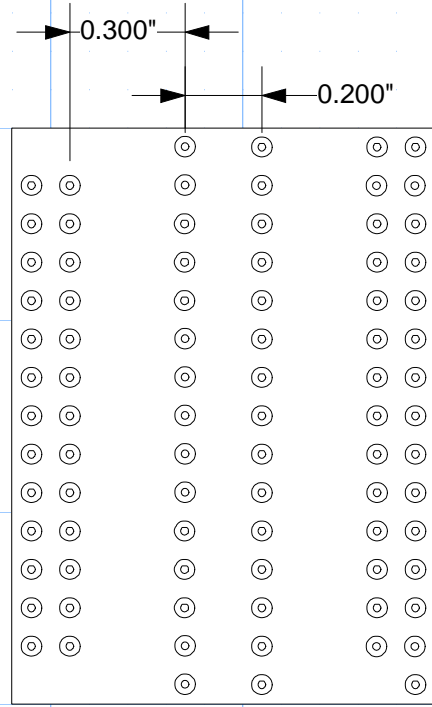

Bottom View (only male pins shown for drawing clarity)

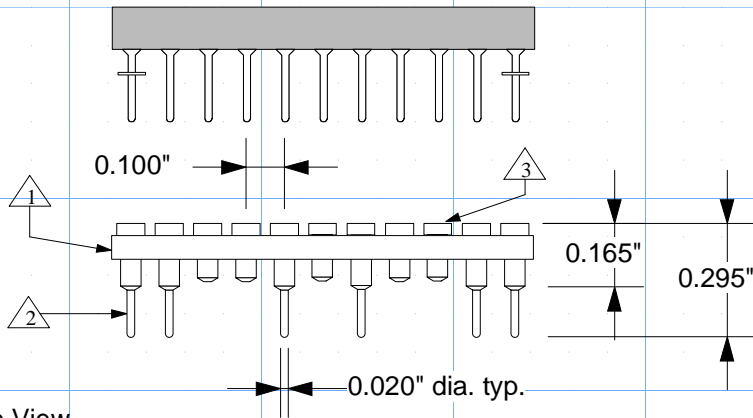

Side View

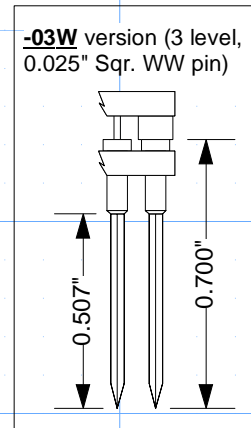


- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- 3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)

**Description: PGA Prototyping Adapter**

85 position PGA socket receptables (0.100" centers) to type F prototyping panel base terminal pins (0.100" centers). PGA package depicted in side view not included. Add "W" to part number for optional wire wrap base.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

<b>PA-PGA85-03(W) Drawing</b>		Status: Released	Scale 3:1	Rev: C
	© 1992 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 <a href="http://www.ironwoodelectronics.com">www.ironwoodelectronics.com</a>		Drawing: P. Jasmin Date: 8/8/92	
			File: PA-PGA085-03 Dwg Modified: 5/28/98	