


Top View

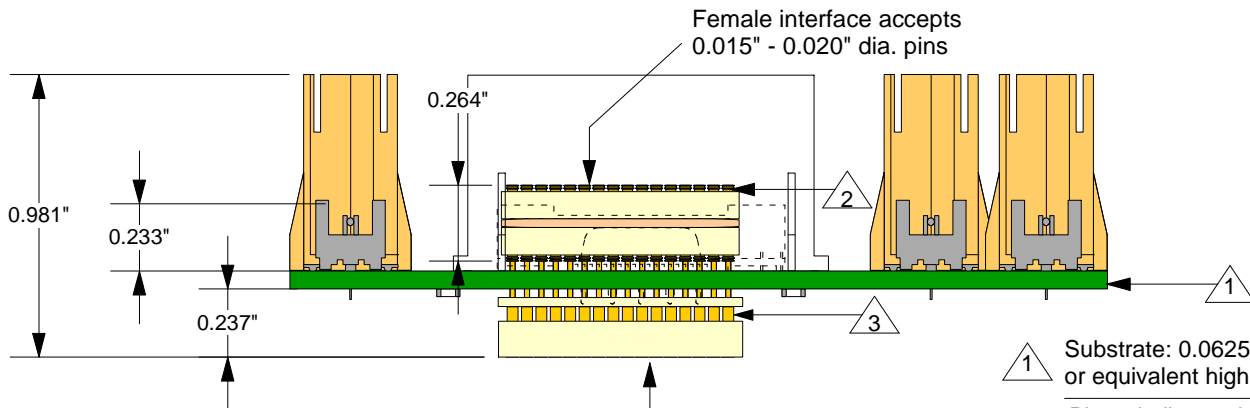


Side View

- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material.
- 2 Pins: shell material- Brass; shell finish- 10µ" Gold over 50µ" Nickel (min.). Contact material- Beryllium copper; contact finish 10µ" Gold over 100µ" Nickel (min.).
- 3 Pins: material- Brass; finish- 10µ" gold over 50µ" nickel (min.).

Description: Logic Analyzer probe board for HP Logic Analyzer

255 position MGA female interface to 255 position MGA female interface with high density Mictor connectors and support shrouds. Pin assignment/ interconnect is configured for the PowerPC 740 microprocessor and HP logic analyzer.

Tolerances: diameters ±0.03mm [±0.001"], PCB perimeters ±0.13mm [±0.005"], PCB thicknesses ±0.18mm [±0.007"], pitches (from true position) ±0.08mm [±0.003"], all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

	PB-BGA-740-02 Drawing	Status: Released	Scale: 2:1	Rev: B
	© 2003 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing: M. Tully	Date: 3/5/03	
		File: PB-BGA-740-02 Dwg.mcd	Modified: 3/17/03, SF	