




Top View

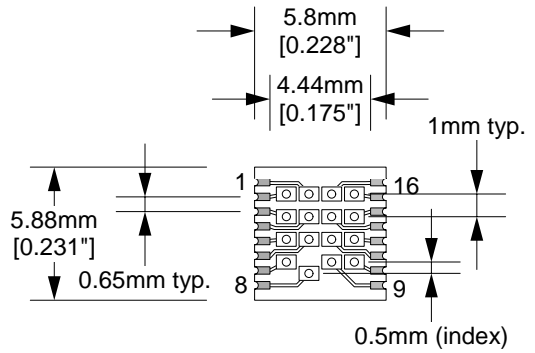

Surface Mount Foot, Top View (scale 3:1)

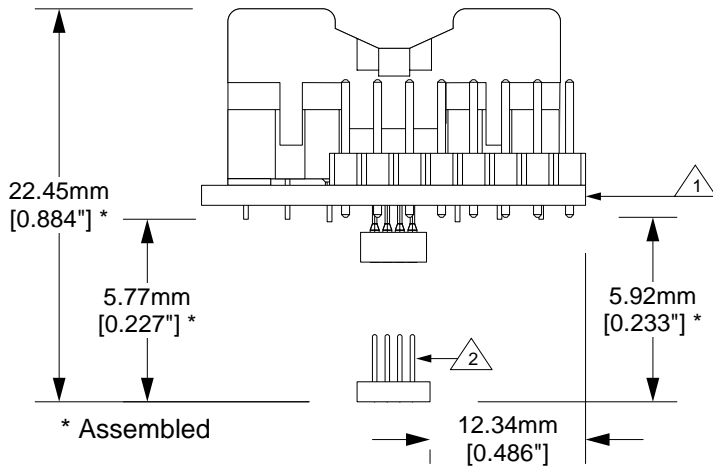

Side View

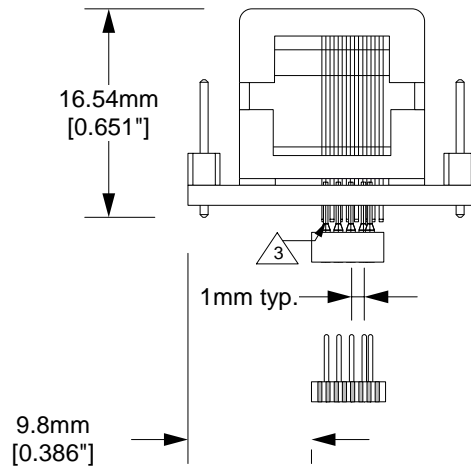

End View

RoHS COMPLIANT

1 Substrate: 1.59mm \pm 0.18mm [0.0625" \pm 0.007"] per IPC 4101/21, lead free HASL finish.

2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10 μ " Au over 50 μ " Ni (min.).


3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10 μ " Au over 50 μ " Ni (min.). Contact material- BeCu; finish 10 μ " Au over 100 μ " Ni (min.).

4 Test points: material- Phosphor Bronze; plating- Sn over 50 μ " Ni. Gold flash on contact end.

Description: Carrier Adaptor (CA), TSSOP

16 position TSSOP type II ZIF socket with test points and mini grid array female pluggable interface to 16 TSSOP type II surface mountable foot, leadless type.

Tolerances: \pm 0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

CA-SO16G-Z-L-T-01F Drawing		Status: Released	Scale 2:1	Rev: A
 <p>© 2007 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com</p>	Drawing: J. Glab		Date: 10/16/07	
	File: CA-SO16G-Z-L-T-01F Dwg.mcd		Modified:	