



- △ 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △ 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- △ 3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Nil (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)
- △ 4 Leads: material- BeCu Alloy 194; plating- 80/20 SnPb.

Top View

End View

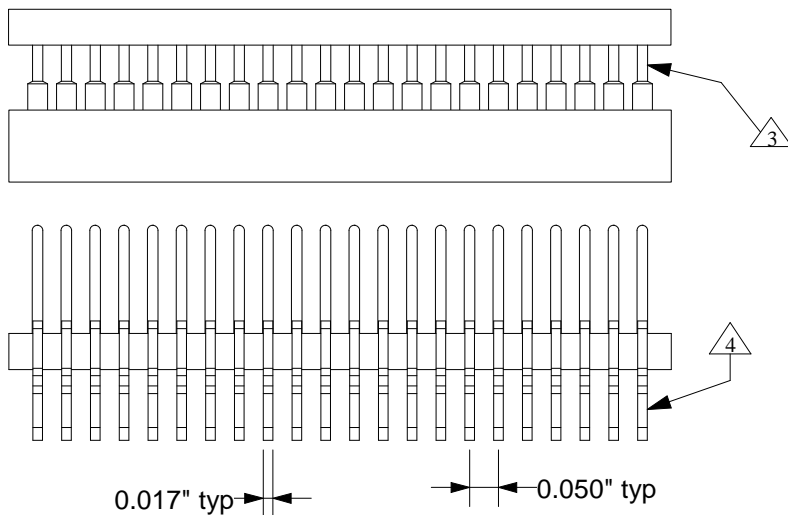


Side View

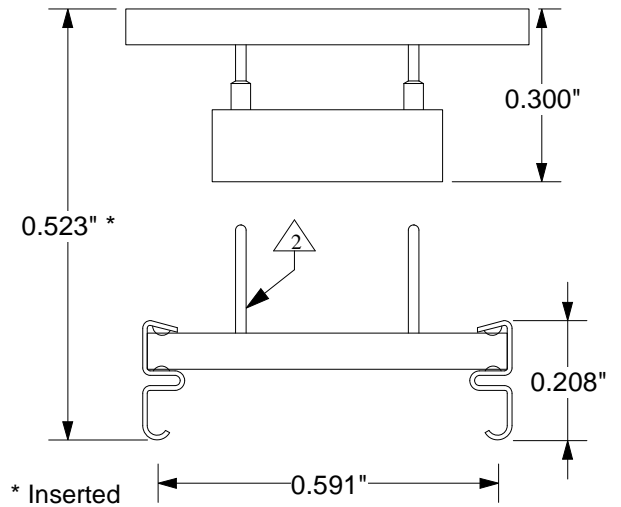

**Description: CARRIER ADAPTOR:**

44 position SOIC (0.52" body width) Zero Insertion Force Socket with Test Points to a 44 position J-leaded surface mount foot

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

	<b>CA-SO44A-S-J-01 Dwg</b>	Status: Released	Scale: 3:1	Rev B:
	© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100	Drawing: M. Tully		Date: 1/12/94
		File: CA-SO44A-S-J-01	Modified: 3/10/98	