


End View

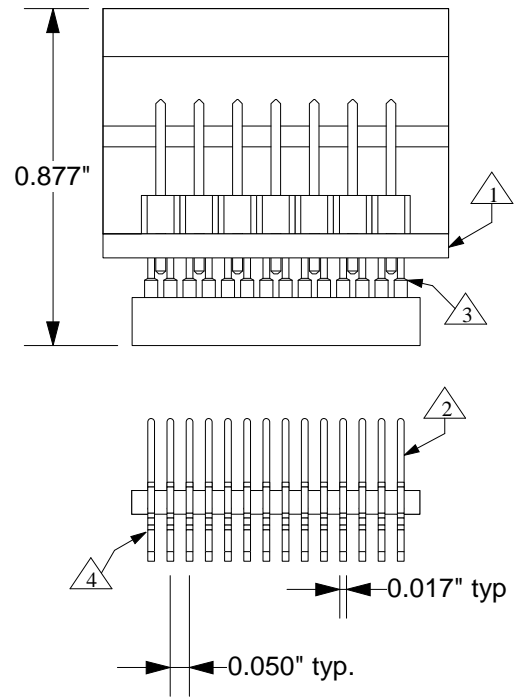


Side View

- △ 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △ 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- △ 3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)
- △ 4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")

Description: CARRIER ADAPTOR
 28 position SOJ ZIF socket to 28 position J-leaded surface mount foot, with test points.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

	CA-SOJ28D-Z-J-T-01 Drawing	Status: Released	Scale: 2:1	Rev:B	
	© 1995 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing by: Matt Lund	Date: 5/23/95		Modified: 1/18/99
		File: CA-SOJ28D-Z-J-T-01 Dwg			