



Top View

Recommended Torque
1.5 in.-lbs.

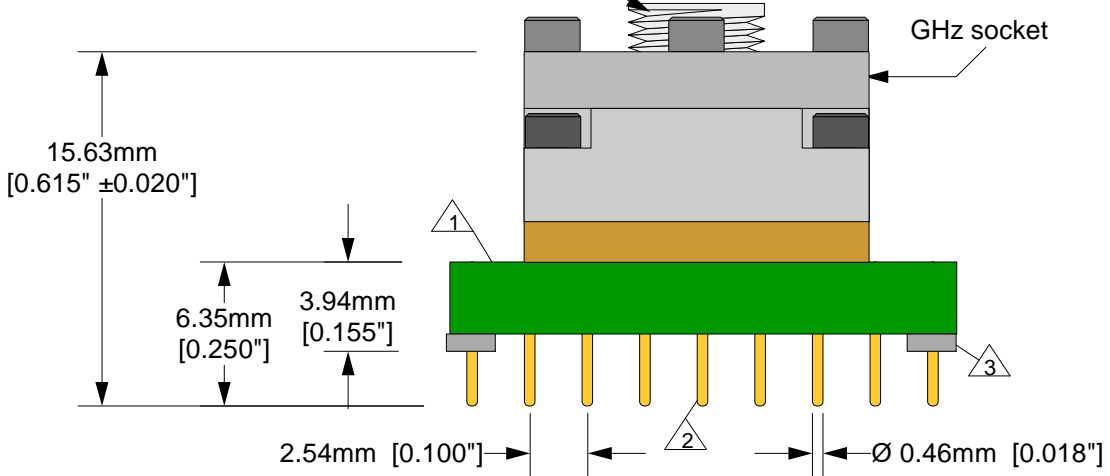


Front View

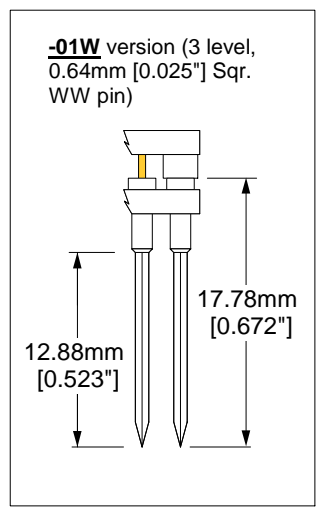

- △1 Substrate: 0.125"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- △3 Stand-off: material- Teflon; 0.090" Dia; 0.030" thick.

Description: Prototyping adaptor
44 position, MLF GHz socket (-Z version) to type PGA base pins (0.100" centers).
Add "W" to end of part number for the inclusion of optional wire wrap sub base.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

 <p>© 2008 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com</p>	<p>PA-MLF44A-P-Z-01(W) Drawing</p>	<p>Status: Released</p>	<p>Scale: 3:1</p>	<p>Rev: D</p>
	<p>Drawing: MA Fedde</p>	<p>Date: 2/3/03</p>		
	<p>File: PA-MLF44A-P-Z-01 Dwg</p>	<p>Modified: 4/30/14</p>		