



Top View

Bottom View  
(only male pins shown for drawing clarity)

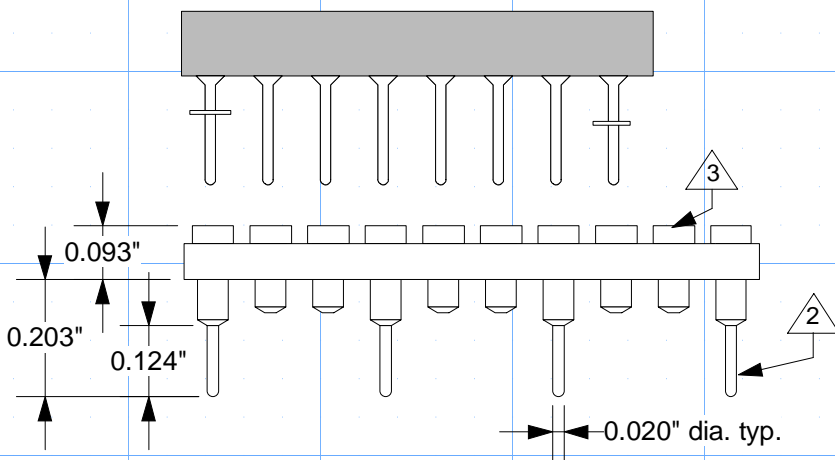

Side View

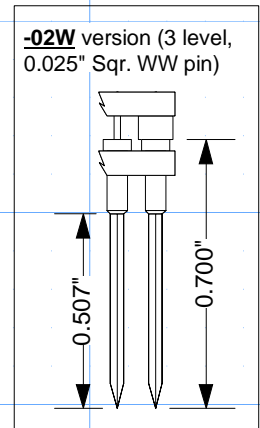


- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material.
- 2 Pins: shell material- Brass; finish- 10µ" gold over 50µ" nickel (min.).
- 3 Pins: shell material- Brass; shell finish- 10µ" Gold over 50µ" Nickel (min.). Contact material- Beryllium copper; contact finish 10µ" Gold over 100µ" Nickel (min.).

Description: PROTOTYPING ADAPTOR

44 position PGA female socket pins to 44 position type C pattern base pins. Add "W" to part number for optional wire wrap base.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

<b>PA-PGA044-02 (w) Drawing</b>		Status: Released	Scale: 2:1	Rev:B
 © 1992 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing: P. Jasmin		Date: 10/21/88	
	File:PA-PGA044-02 Dwg		Modified: 5/26/98.	