

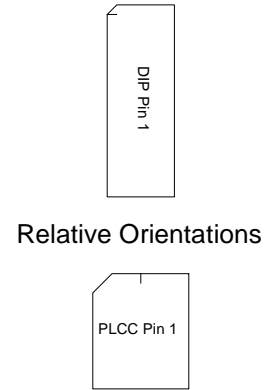


Top View

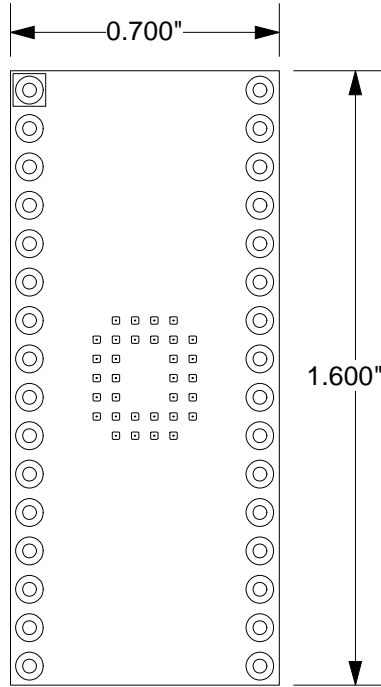


Side View

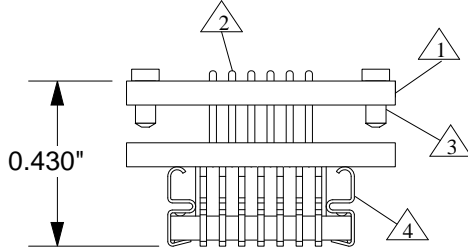

Description: **PACKAGE CONVERTOR**
 32 position DIP socket to 32 position PLCC plug. Pin out is 1:1.
 Other PLCC interface options include SMT foot and Clip.

- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- 3 Pins: shell material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.). Contact material- BeCu; finish 10µ" Au over 100µ" Ni (min.)
- 4 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

	PC-DIP/PLCC32-P-01 Drawing	Status:released	Scale: 2:1	Rev: B
	© 1996 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing by: C. Hautman	Date: 12/27/96	
		File: PC-DIP/PLCC32-P-01 Dwg	Modified 3/1/99	