



Top View

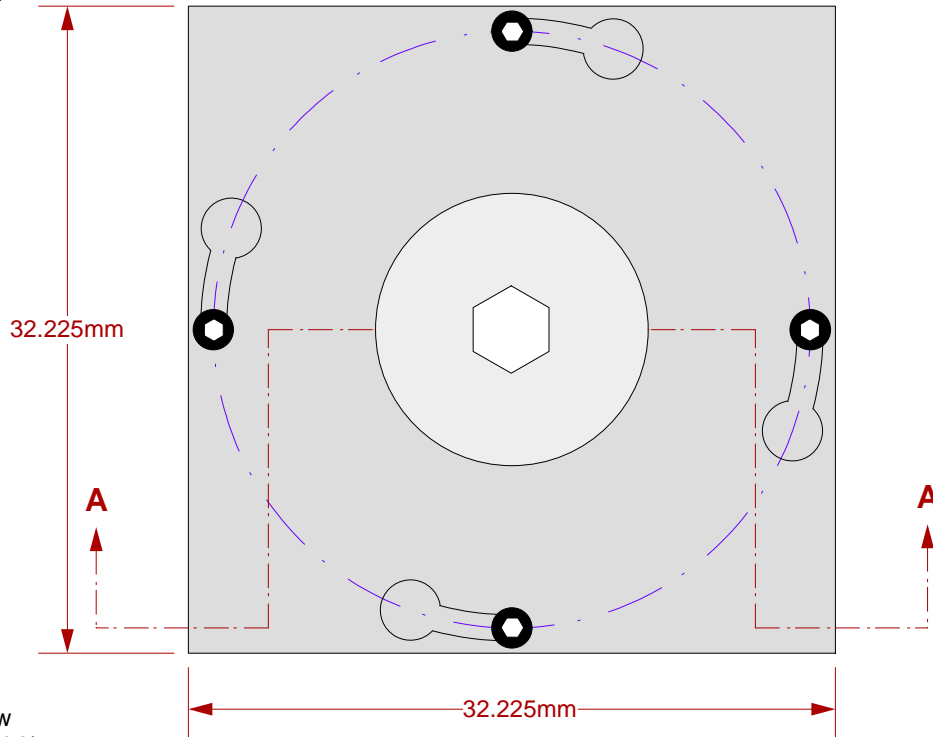

Side View
(Section AA)

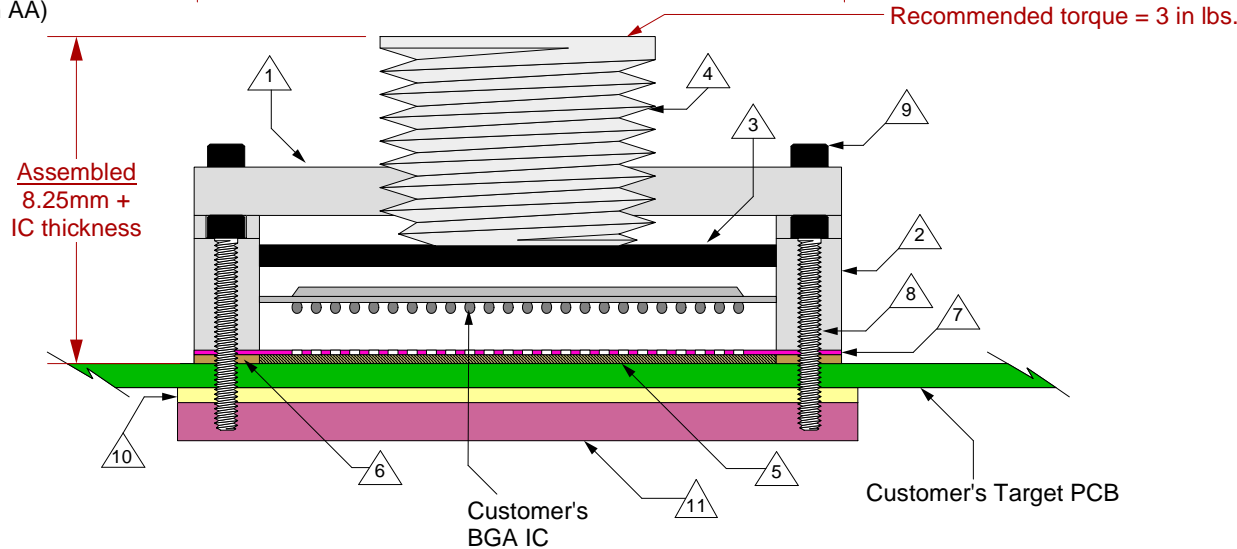

GHz BGA Socket - Direct mount, solderless

Features

- Directly mounts to target PCB (needs tooling holes) with hardware.
- High speed, reliable Elastomer connection
- Minimum real estate required
- Compression plate distributes forces evenly
- Ball guide prevents over compression of elastomer
- Easily removable swivel socket lid

- △ 1 Socket Lid: Black anodized Aluminum. Thickness = 2.5mm.
- △ 2 Socket base: Black anodized Aluminum. Thickness = 5mm.
- △ 3 Compression Plate: Black anodized Aluminum. Thickness = 2.5mm.
- △ 4 Compression screw: Black anodized Aluminum. Thickness = 5mm, Hex socket = 5mm.
- △ 5 Elastomer: 40 micron dia gold plated brass filaments arranged symmetrically in a silicone rubber (63.5 degree angle). Thickness = 0.75mm.
- △ 6 Elastomer Guide: Non-clad FR4. Thickness = 0.725mm.
- △ 7 Ball Guide: Kapton polyimide.
- △ 8 Socket base screw: Fillister head, Alloy steel with black oxide finish, 0-80 fine thread, 12.7mm long.
- △ 9 Socket lid screw: Shoulder screw, 18-8 SS, 0-80 fine thread.
- △ 10 Insulation Plate: FR4/G10, 1.59mm thick.
- △ 11 Backing Plate: Anodized Aluminum 6.35mm thick.

SG-BGA-6010 Drawing

© 2001 IRONWOOD ELECTRONICS, INC.
PO BOX 21151 ST. PAUL, MN 55121
Tele: (651) 452-8100
www.ironwoodelectronics.com

Status: Released

Scale: -

Rev: G

Drawing: Meghann Fedde


Date: 8/17/01

File: SG-BGA-6010 Dwg

Modified: 5/19/09

All tolerances: ± 0.125 mm (unless stated otherwise). Materials and specifications are subject to change without notice.

***Note: BGA pattern is not symmetrical with respect to the mounting holes.**

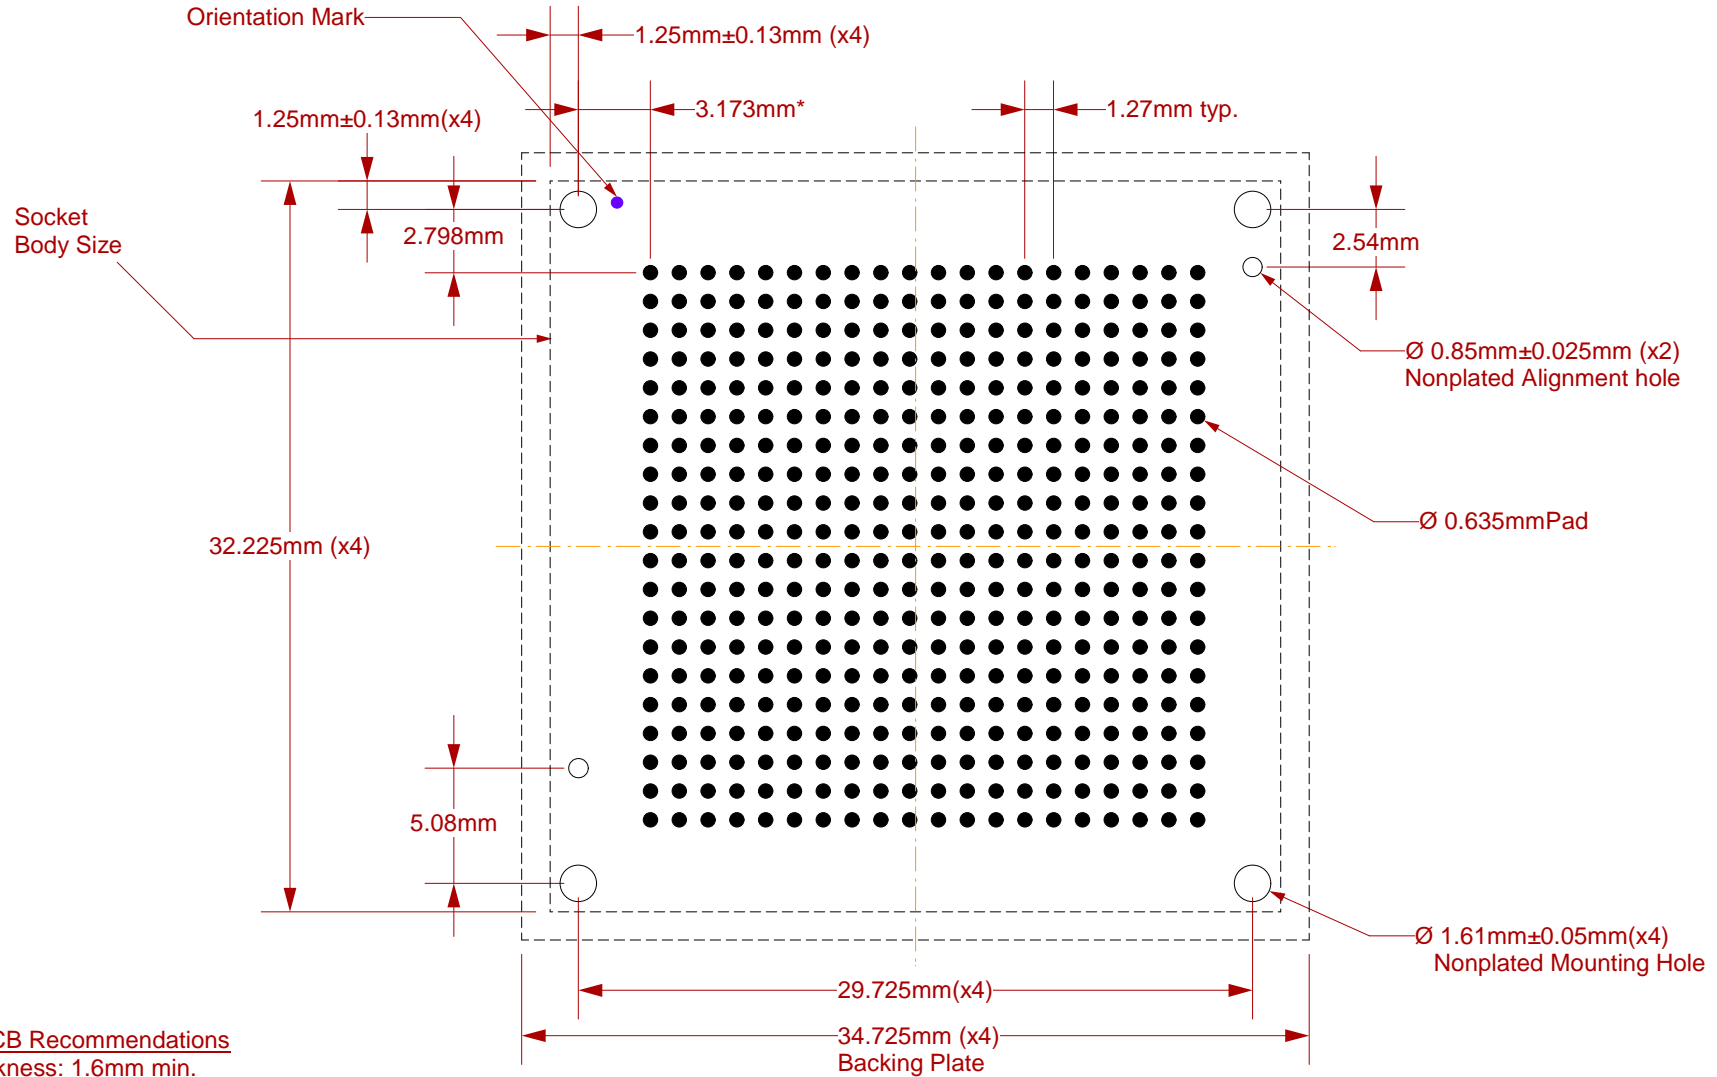


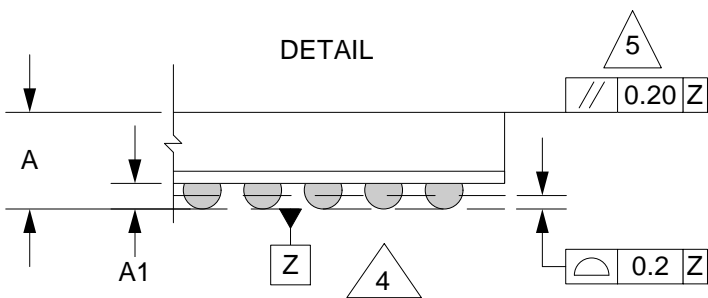
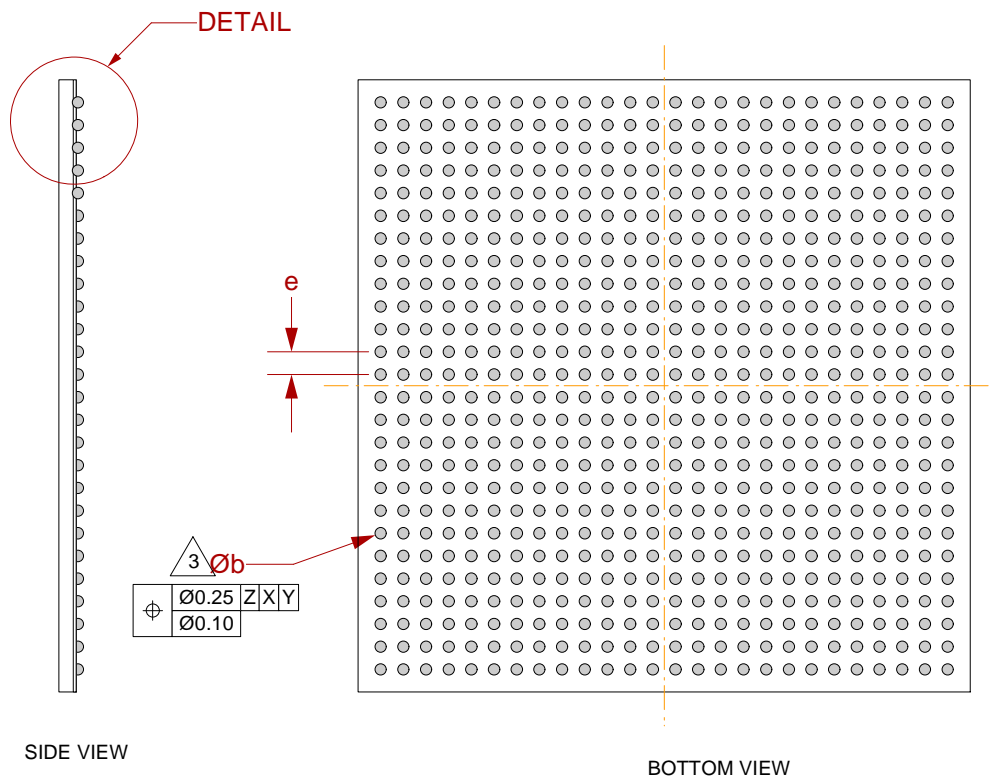
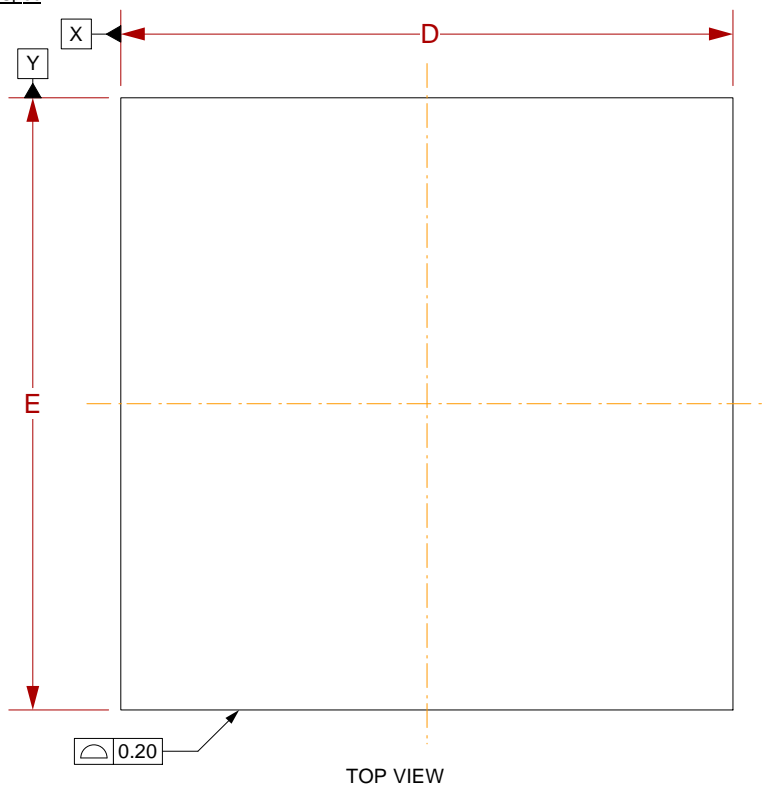
Target PCB Recommendations

Total thickness: 1.6mm min.
Plating: Gold or Solder finish
PCB Pad height: Same or higher than solder mask

NOTE: Steel backing plate may be required based on end user's application

Recommended PCB Layout Tolerances: $\pm 0.025\text{mm}$ [$\pm 0.001''$] unless stated otherwise.

	SG-BGA-6010 Drawing		Status: Released	Scale: 3:1	Rev: G
	© 2001 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com			Drawing: Meghann Fedde	
	File: SG-BGA-6010 Dwg		Date: 8/17/01 Modified: 5/19/09		



- 1 Dimensions are in millimeters.
- 2 Interpret dimensions and tolerances per ASME Y14.5M-1994.
- 3 Dimension b is measured at the maximum solder ball diameter, parallel to datum plane Z.
- 4 Datum Z (seating plane) is defined by the spherical crowns of the solder balls.
- 5 Parallelism measurement shall exclude any effect of mark on top surface of package.

DIM	MIN	MAX
A		2.5
A1	0.5	0.7
b		0.90
D	27.00 BSC	
E	27.00 BSC	
e	1.27 BSC	

Array 20x20

SG-BGA-6010 Drawing

Status: Released

Scale: -

Rev: G



© 2001 IRONWOOD ELECTRONICS, INC.
 PO BOX 21151 ST. PAUL, MN 55121
 Tele: (651) 452-8100
 www.ironwoodelectronics.com


Drawing: Meghann Fedde

Date: 8/17/01

File: SG-BGA-6010 Dwg


Modified: 5/19/09

Top View

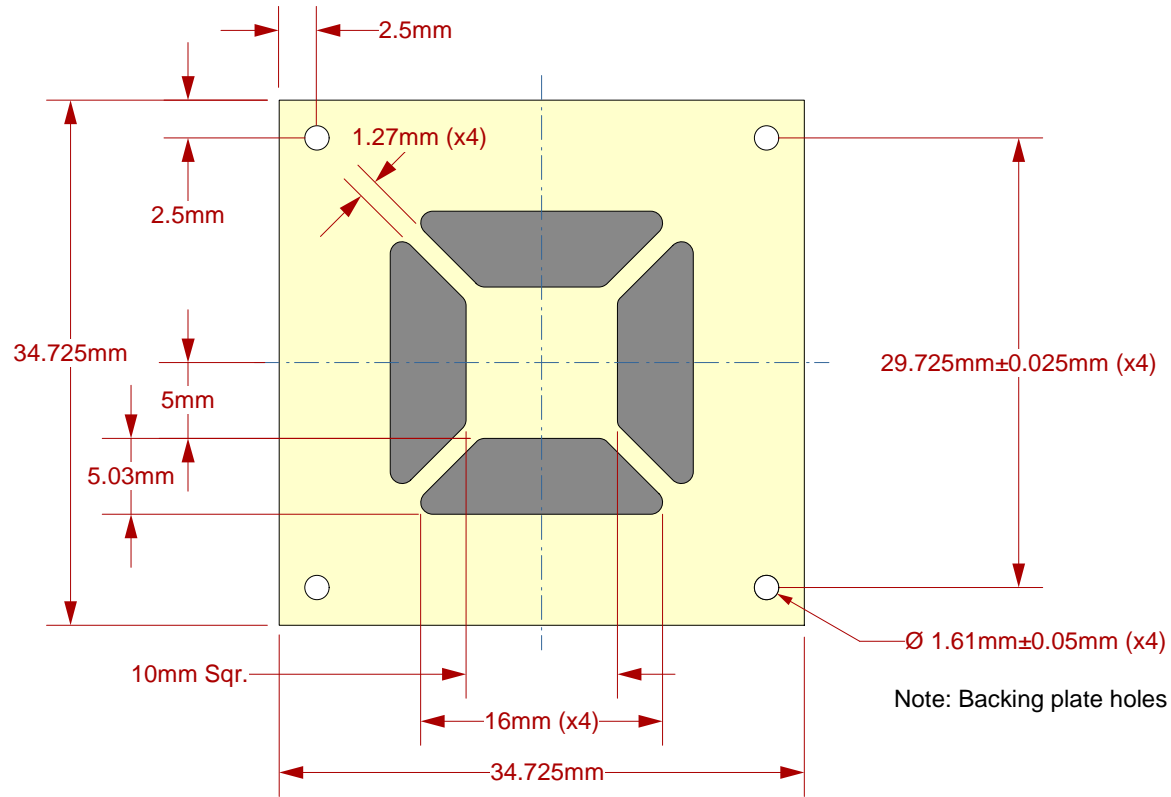

Note: Backing plate holes are tapped to accept 0-80 screws.

Side View

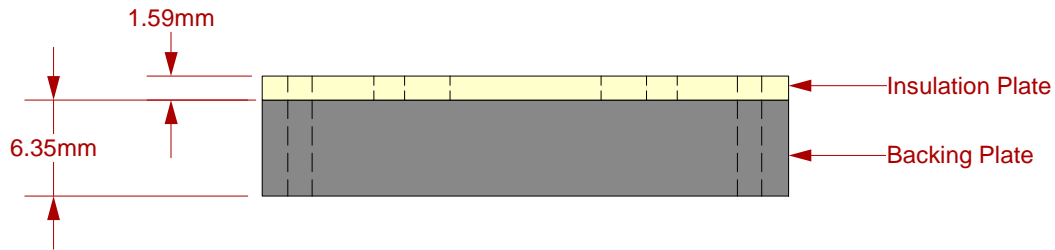

Description: Backing Plate with Insulation Plate

All dimensions are in mm.
All tolerances are +/- 0.125mm.
(Unless stated otherwise)

SG-BGA-6010 Drawing

© 2001 IRONWOOD ELECTRONICS, INC.
PO BOX 21151 ST. PAUL, MN 55121
Tele: (651) 452-8100
www.ironwoodelectronics.com

Status: Released

Scale: -

Rev: G

Drawing: Meghann Fedde

Date: 8/17/01

File: SG-BGA-6010 Dwg

Modified: 5/19/09