




Included Hex Bits

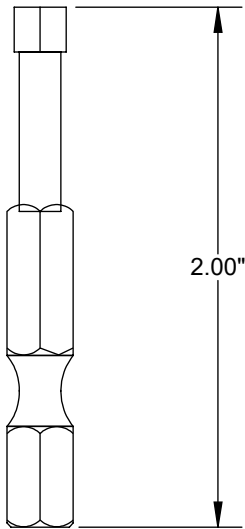

5MM HEX BIT, 1/4" HEX SHANK

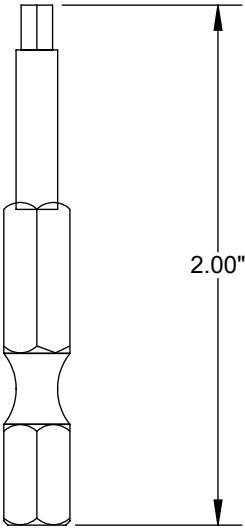

3MM HEX BIT, 1/4" HEX SHANK




0.050" HEX BIT, 1/4" HEX SHANK

Description: TL-Torquedriver-12

Primary dimension units are millimeters. Secondary dimension units are [inches].
 Tolerances: Hole diameters $\pm 0.0254\text{mm}$ [$\pm 0.001"$], Pitches (from true position) $\pm 0.0254\text{mm}$ [$\pm 0.001"$],
 substrate thickness tolerance $\pm 10\%$, all other tolerances $\pm 0.127\text{mm}$ [$\pm 0.005"$] unless stated otherwise.
 Materials and specifications are subject to change without notice.

**NOTE: SPECIFY TORQUE WHEN PLACING ORDER:
 0.5-16 ozf-in**

TL-Torquedriver-12 Specification		MATERIAL:	STATUS: Released	SHEET 1 OF 1	REV. A
 ©2017 Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com	FINISH:	ENG: J. Vavra	Drawn By: J. Vavra		
	WEIGHT:	File: TL-Torquedriver-12 Dwg	DATE: 02/24/2017	SCALE: 70:1	