






TORQUE GAUGE/SCREWDRIVER,  
CLOCKWISE/COUNTERCLOCKWISE,  
0-3 IN-OZF TORQUE

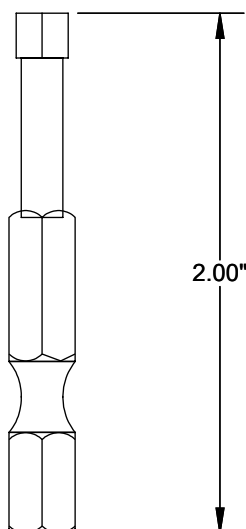

5MM HEX BIT, 1/4" HEX SHANK

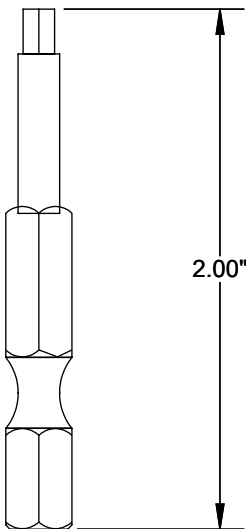

3MM HEX BIT, 1/4" HEX SHANK




0.050" HEX BIT, 1/4" HEX SHANK

## Description: TL-Torquedriver-13, 0-3 IN-OZF Torque

Primary dimension units are millimeters, Secondary dimension units are [inches].

Tolerances: Hole diameters  $\pm 0.03\text{mm}$  [ $\pm 0.001"$ ], Pitches (from true position)  $\pm 0.025\text{mm}$  [ $\pm 0.001"$ ], substrate thickness tolerance  $\pm 10\%$ , all other tolerances  $\pm 0.13\text{mm}$  [ $\pm 0.005"$ ] unless stated otherwise. Materials and specifications are subject to change without notice.


<b>TL-Torquedriver-13 Specification</b>		<b>MATERIAL:</b>	<b>STATUS:</b> Released	SHEET 1 OF 2	REV. A
	Ironwood Electronics, Inc.	<b>FINISH:</b>	ENG: A. Nord	SCALE: 70:1	
	Tele: (800) 404-0204	<b>WEIGHT:</b>	File: TL-Torquedriver-13 Dwg	DATE: 11/17/2016	
	www.ironwoodelectronics.com				

Rev	Date	Initials	Description
A	-	-	Original

## Description: Revision History

Primary dimension units are millimeters, Secondary dimension units are [inches].

Tolerances: Hole diameters  $\pm 0.03\text{mm}$  [ $\pm 0.001"$ ], Pitches (from true position)  $\pm 0.025\text{mm}$  [ $\pm 0.001"$ ], substrate thickness tolerance  $\pm 10\%$ , all other tolerances  $\pm 0.13\text{mm}$  [ $\pm 0.005"$ ] unless stated otherwise. Materials and specifications are subject to change without notice.

	<b>Specification</b> Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com	<b>MATERIAL:</b>	<b>STATUS:</b> Released	SHEET 2 OF 2	REV. A
		<b>FINISH:</b>	DRAWN BY: A. Nord	SCALE: 1:1	
		<b>WEIGHT:</b>	File: TL-Torquedriver-13 Dwg	DATE: 11/17/2016	