



Included Hex Bits




0.2-1.3 lbf-in

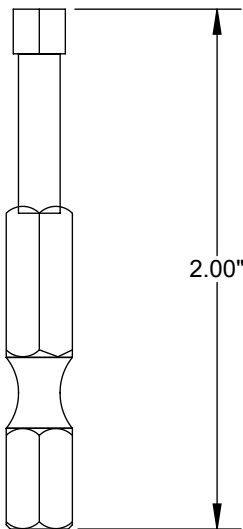

5MM HEX BIT, 1/4" HEX SHANK

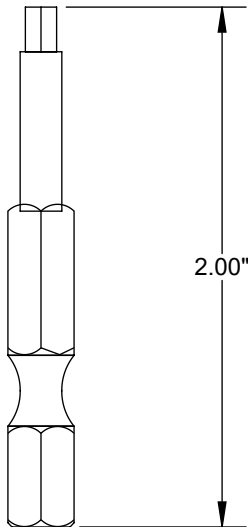

3MM HEX BIT, 1/4" HEX SHANK



0.050" HEX BIT, 1/4" HEX SHANK

Description: TL-TORQUEDRIVER-14, ADJUSTABLE 0.2-1.3 LBF-IN.

Primary dimension units are millimeters, Secondary dimension units are [inches].
Tolerances: Hole diameters $\pm 0.0254\text{mm}$ [$\pm 0.001"$], Pitches (from true position) $\pm 0.0254\text{mm}$ [$\pm 0.001"$],
substrate thickness tolerance $\pm 10\%$, all other tolerances $\pm 0.127\text{mm}$ [$\pm 0.005"$] unless stated otherwise.
Materials and specifications are subject to change without notice.

Rev	Date	Initials	Description
A	07/31/2018	JV	Original

TL-TORQUEDRIVER-14 DWG		MATERIAL:	STATUS: Released		SHEET 1 OF 1		REV. A
 ©2018 Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com		FINISH:	ENG: J. Vavra		Drawn By: J. Vavra		
		WEIGHT:	File: TL-Torquedriver-14 Dwg		DATE: 07/31/2018		SCALE: 70:1