



Ironwood
ELECTRONICS

www.ironwoodelectronics.com

Socket Technologies



Toll Free: (800) 404-0204 U.S. Only

Tel: (952) 229-8200

Fax: (952) 229-8201

email: info@ironwoodelectronics.com

Introduction

- **Company Overview**


- Over 8,000 products
- High Performance Adapters and Sockets
- Many Custom Designs
- Engineering – Electrical and Mechanical
- ISO9001:2015 Registration

- **Socket Technology Overview**


- Embedded gold plated wire elastomer (SG)
- Stamped & Etched spring pins (SBT)
- Embedded silver ball elastomer matrix (SM/SMP)
- Compressible silver button in polyimide (GT/GTP)
- Surface mount adapters for sockets (SF)

Embedded gold plated wire

40GHz GHz elastomer socket (SG)

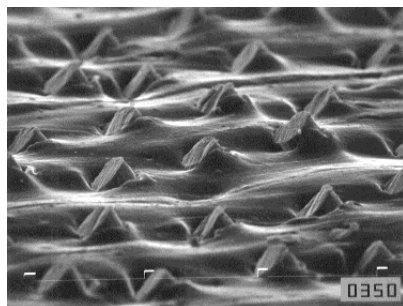


Protruded wire
from elastomer

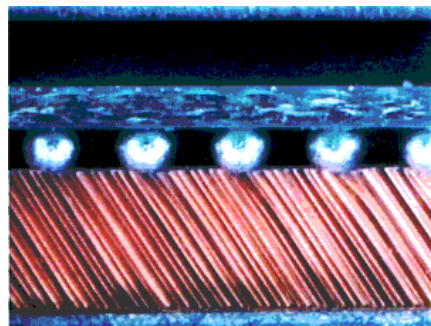


BGA compressed on Elastomer



Wire marks on BGA



Heat sink lid

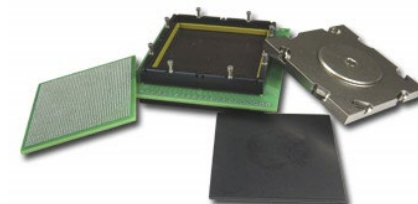

Xilinx FPGA socket


Features	Benefits
Short contact	High bandwidth applications
Gold plated Brass wire	Low contact resistance
Small socket footprint	Easy to place inductors, capacitors, resistors, etc for tuning and increasing bandwidth. Ideal for IC prototype and system testing and field upgradeable system designs
High resilient elastomer	Compression cycles in thousands
Optimized contact force	Reliable connection without damage to device or board

Capabilities


- 0.3mm to 1.27mm pitch
- 1x1mm to 55x55mm device
- BGA, QFN, QFP, SOIC
- 4000 pin count
- Heat sink options
- Easy chip replacement
- Custom support plate options



Open top lid

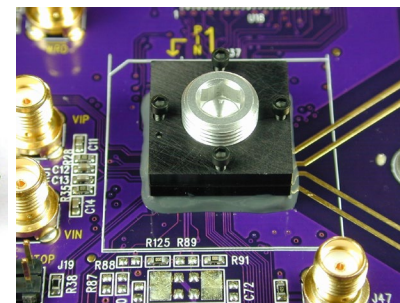

No mounting hole socket

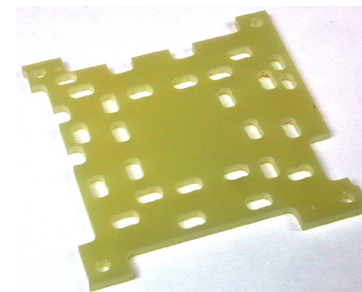

Custom insulation plate

Stamped & Etched spring pin


31.7 GHz socket (SBT)




LGA high force pin



BGA low force pin

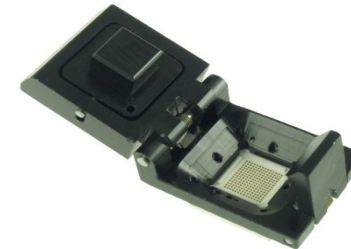

BGA socket w/ Snap Lid



Open top socket



Super short
Etched spring pin

Features	Benefits
Long contact travel	Compliance for large package warpage
Gold plated BeCu material	High temperature applications
Small socket footprint	Easy to place inductors, capacitors, resistors, etc for tuning and increasing bandwidth. Ideal for IC prototype and system testing and field upgradeable system designs
High resilient spring	Compression cycles in hundreds of thousands
Optimized pin diameter to length ratio	Impedance matched high speed applications
Stamped contact	High current applications
Automated assembly	Low cost, short lead time

Crown Plunger


External Spring




Cone /ball
Plunger

Capabilities


- 0.3mm to 1.27mm pitch
- 1x1mm to 60x60mm device
- BGA, LGA, QFN, QFP, SOIC
- 5000 pin count
- Heat sink options
- Easy chip replacement
- Custom support plate options



Floating plate for precise
alignment and swivel lid

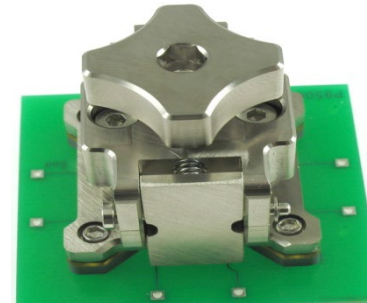

Clamshell BGA socket



Continuous improvement


Proven Capability

Development


10 Years

Embedded silver ball


45 GHz elastomer socket (SM/SMP)

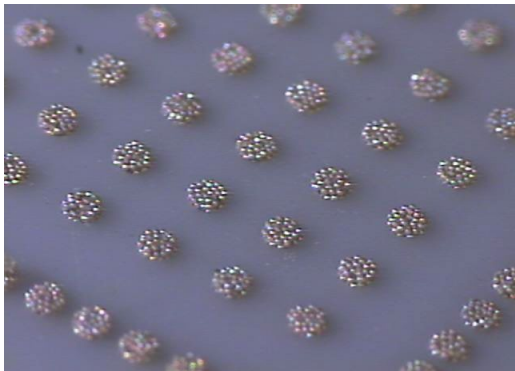

Array of Columns - Elastomer Matrix

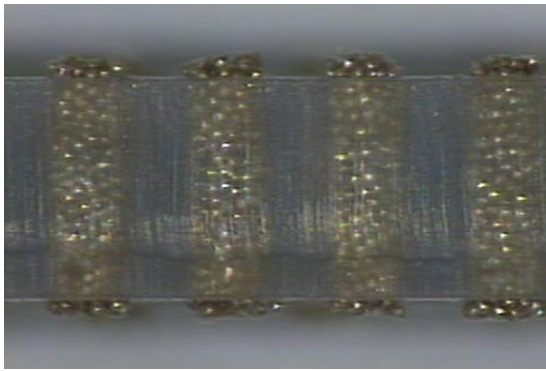

Cross section - Silver balls

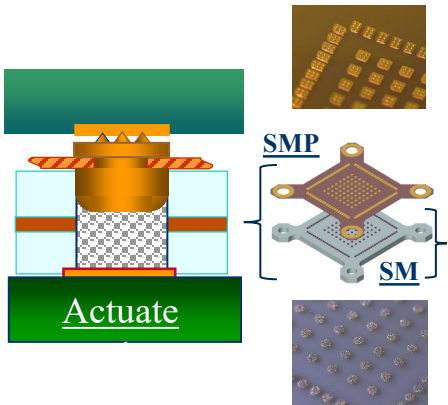

SMP = Elastomer layer + Protective layer


Continuous improvement

Proven Capability

Development


8 Years

Features	Benefits
Shortest contact	Highest bandwidth applications
Silver balls	Low contact resistance
Small socket footprint	Easy to place inductors, capacitors, resistors, etc for tuning and increasing bandwidth. Ideal for IC prototype and system testing and field upgradeable system designs
High resilient elastomer	Compression cycles in hundreds of thousands
Matrix with core	Optimized force and built-in compression stop mechanism

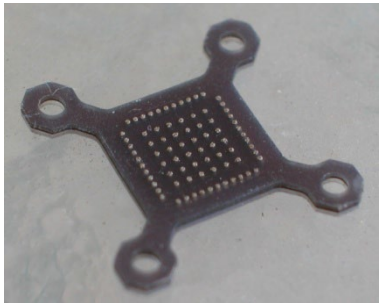


Replaceable elastomer module

- Capabilities**
- 0.25mm to 1.27mm pitch
 - 1x1mm to 60x60mm device
 - BGA, LGA, QFN
 - 3000 pin count
 - Heat sink options
 - Easy chip replacement
 - Custom support plate options

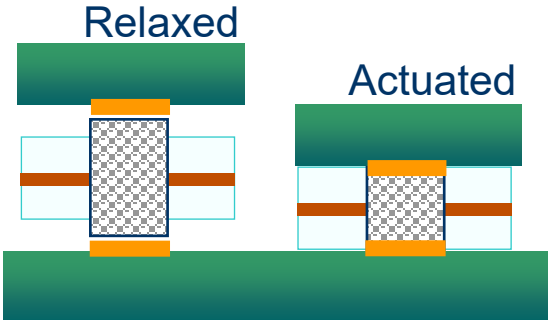


Rest & Test condition

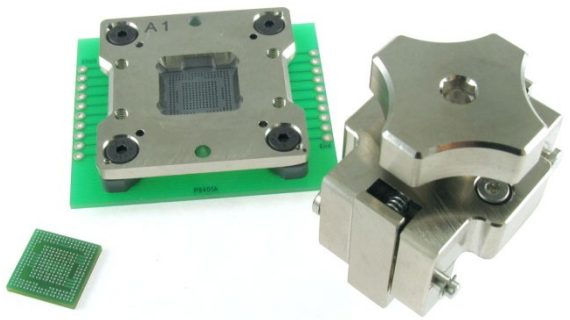


ATE socket with double latch clam shell lid

Compressible silver button 94 GHz elastomer socket (GT/GTP)

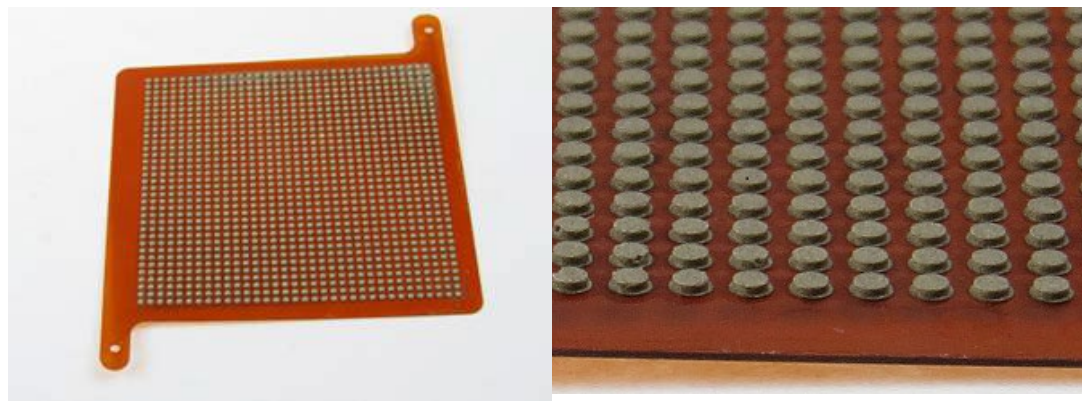

Array of Silver Buttons - Elastomer Matrix

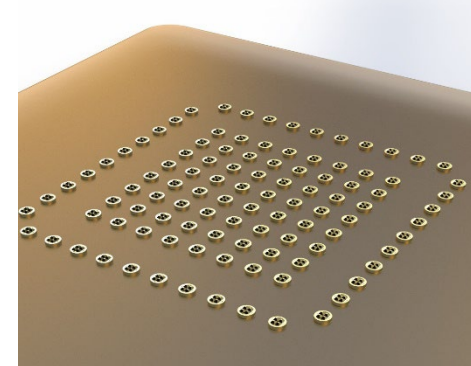


Protective layer over Elastomer Matrix

Features	Benefits
Shortest contact	Highest bandwidth applications
Silver particles	Low contact resistance
Small socket footprint	2.5 mm per side larger than actual IC packages
Individual buttons	No mechanical coupling
Laser cut substrate	Precise contact location

Capabilities


- 0.2mm to 1.27mm pitch
- 1x1mm to 50x50mm device
- BGA, LGA, QFN
- 5000 pin count
- Heat sink options
- Easy chip replacement
- Custom support plate options




Lever actuated socket



Socket with heat sink

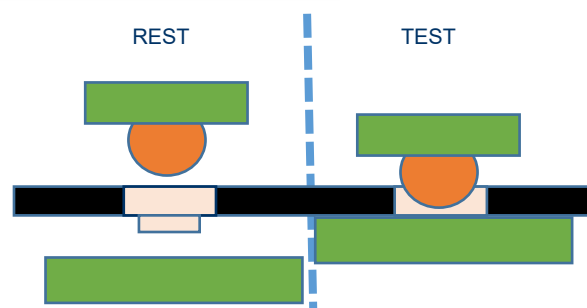

BGA Rest & Test condition

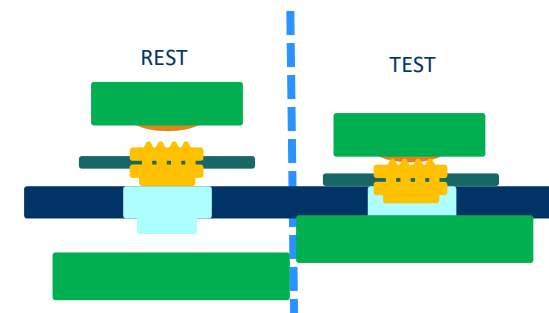



QFN, LGA Rest & Test condition

Contact Technology Summary

<u>Characteristics</u>	<u>Embedded Wire Elastomer (SG)</u>	<u>Stamped spring pins (SBT)</u>	<u>Embedded Silver Ball Elastomer Matrix (SM/SMP)</u>	<u>Silver Button Elastomer (GT/GTP)</u>
Bandwidth, GHz	27 to 56.8	4.15 to 31.7	44.8	94
Endurance, Cycles*	2K	500K	5K/500K	1K/200K
Resistance, mΩ	20	15	15	20
Self Inductance, nH	0.11 to 0.28	0.88 to 0.98	0.1	0.04
Max Current, Amp	2	8	7.8	7.8
Temp Range, °C	-35 to +125	-55 to +180	-55 to +155	-55 to +160
Pitch, mm	0.3 to 1.27	0.3 to 1.27	0.25 to 1.27	0.2 to 1.27
Package Types	BGA, QFN, QFP, SOIC	BGA, LGA, QFN, QFP, SOIC	BGA, LGA, QFN	BGA, LGA, QFN
Lab test	√	√	√	√
Production test		√	√	√
Field upgrade	√	√	√	√
Temperature test	√	√	√	√
Kelvin test	√	√	√	√
Burn-in test		√		

*Cycle life shown at room temperature. Reduced cycle life is expected when used at extreme temperatures, thermal cycling, improper force, cleaning and handling.

Pin Datasheet

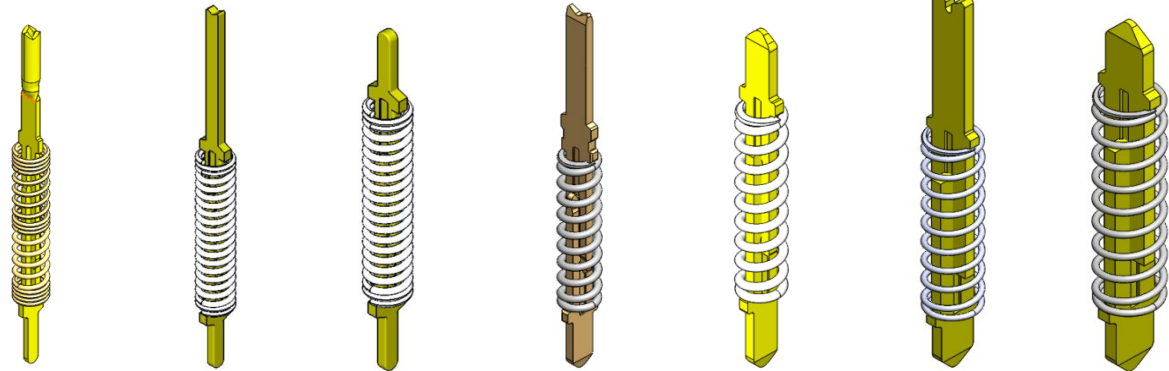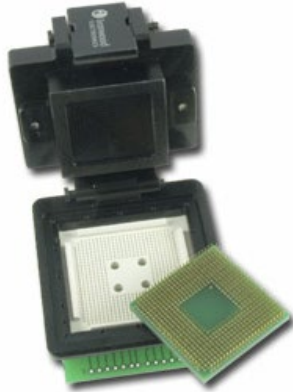


Pin Family	SBT	SBT	SBT	SBT	SBT	SBT	SBT
Part Number	P-P204A	P-P185A	P-P184A	P-P196A	P-P150A	P-P151A	P-P152A
Minimum Pitch (mm)	0.35	0.4	0.4	0.5	0.5	1.0	1.0
Pin Type	BGA	BGA	LGA	BGA	LGA	BGA	LGA
Length (mm)	3.46	3.81	2.9	3.86	2.95	5.69	4.45
DUT Side Tip Shape	Crown	V Shape	Radius Cone	V Shape	Radius Cone	Notched V	Radius Cone
DUT Side Tip Dimension (mm)	0.17	0.14	0.12	0.2	0.06	0.54	0.1
PCB Side Tip Shape	Radius Cone	Radius Cone	Radius Cone	Radius Cone	Radius Cone	Radius Cone	Radius Cone
PCB Side Tip Dimension (mm)	0.12	0.12	0.12	0.04	0.06	0.1	0.1
DUT Side Travel (mm)	0.3	0.3	0.3	0.33	0.33	0.6	0.6
PCB Side Travel (mm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Force (g)	8.7	14.5	14.5	30	30	19	19
Cres (mOhms)	< 70	< 50	< 100	< 30	< 30	< 15	< 15
CCC @ ambient (Amps)	0.5	1.8	1.8	2.9	2.9	4.0	4.0
Bandwidth (GHz @ -1dB)**	23.5 - 26.1	20.5 - 31.7	20.5 - 31.7	5.2 - 15.7	5.2 - 15.7	14.1 - 21.9	14.1 - 21.9
Self inductance (nH)	0.92	0.98	0.98	0.88	0.88	0.93	0.93
Temperature (deg C)	-55 to +180C	-55 to +180C	-55 to +180C	-55 to +180C	-55 to +180C	-55 to +180C	-55 to +180C
Insertion Cycles	50K	75K	75K	500K	500K	500K	500K

* 0.4mm/0.5mm pitch SBT pins are used in 0.65mm and 0.8mm pitch applications


** Bandwidth range is based on pin location (corner, edge, field). See report for test conditions and setup.

Socket Lid Options


Swivel Lid Socket

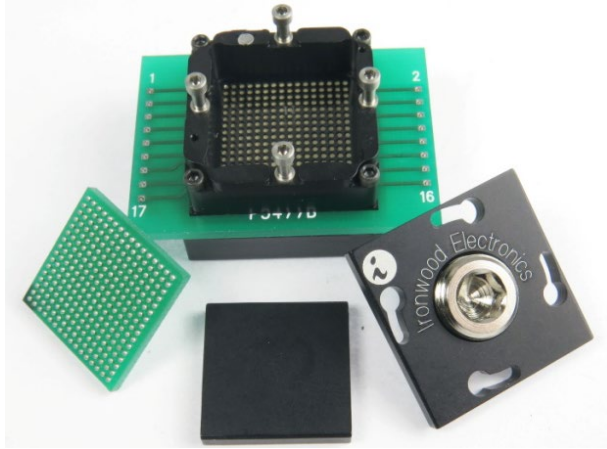


Screw Top Socket w/Center Open

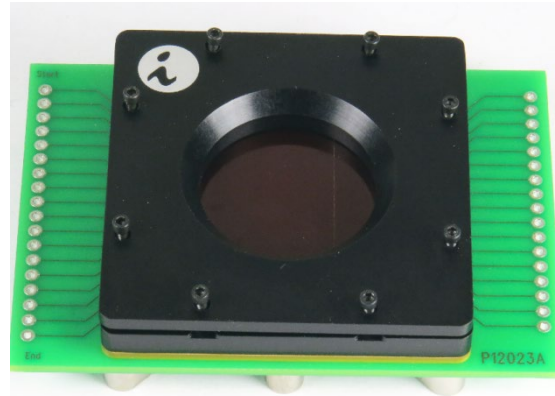


Snap Lid Socket w/Center Open

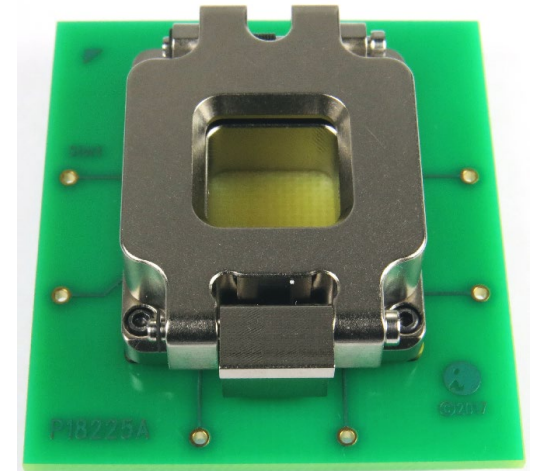


Double Latch Socket w/Center Open

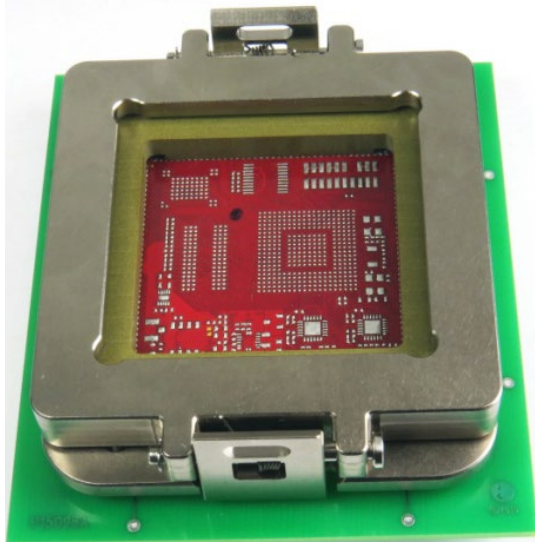

Double Latch Socket w/Handle

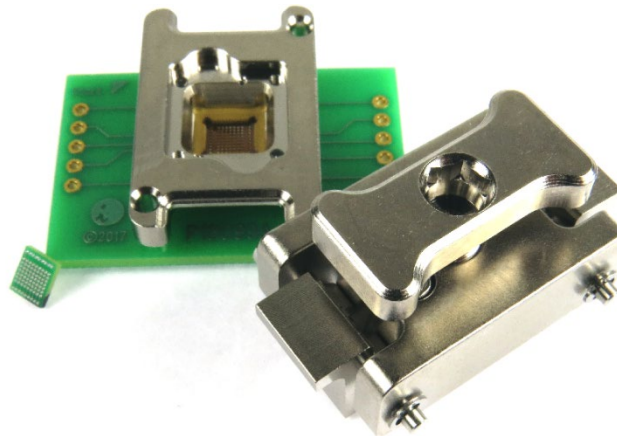


Snap Lid with adjustable pressure screw Socket

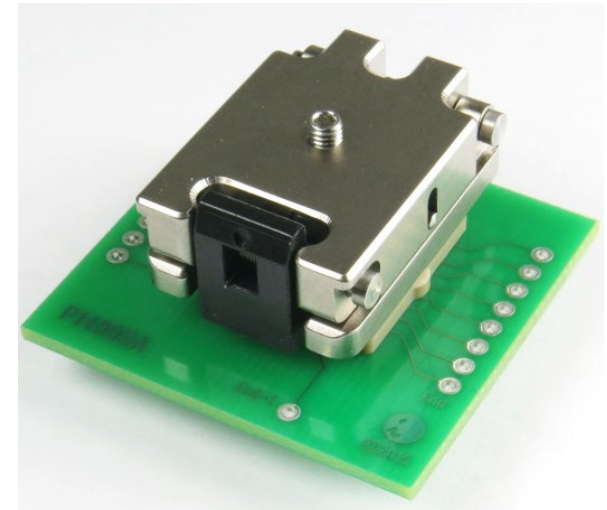


Socket Lid Options


Clamshell Socket w/Center Open

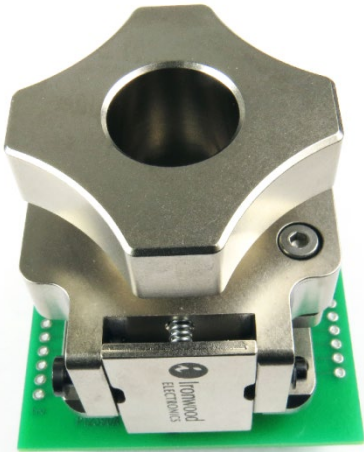


Clamshell Adjustable Hard Stop Socket

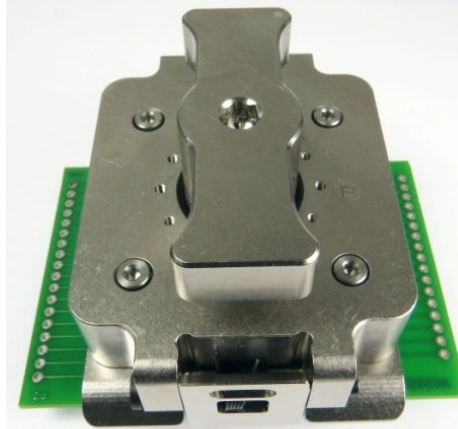


Clamshell Socket w/Heat Sink

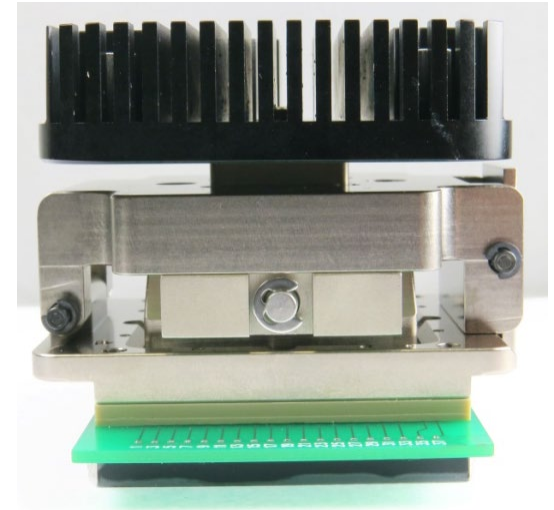


Lever Lid Socket

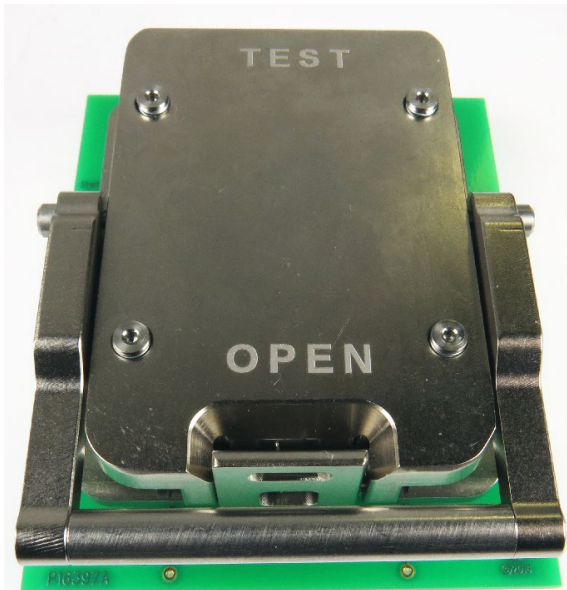


Lever Lid Socket w/Center Open

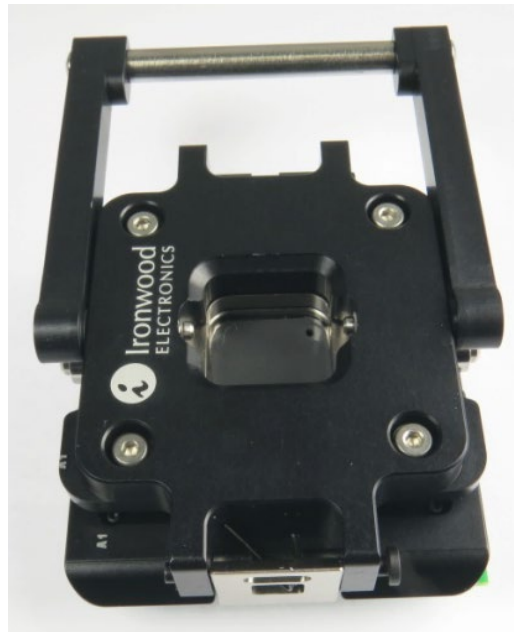


Lever Lid Socket
w/Fan and Heat Sink

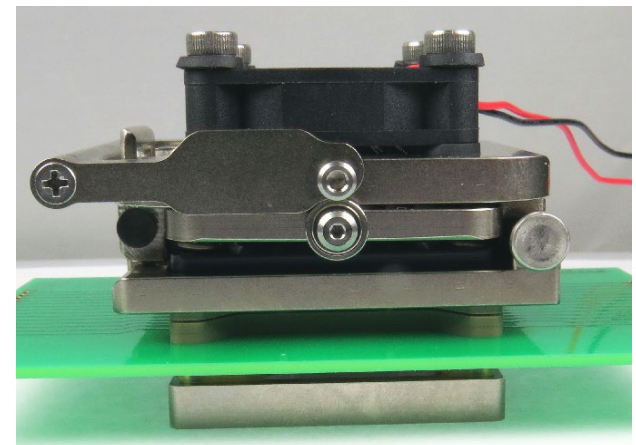


Surface Mount Adapters for sockets (SF)




Surface mount adapter

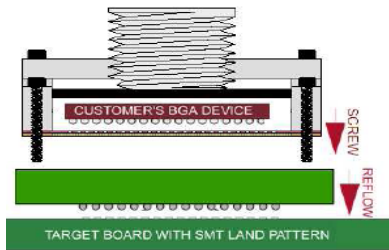

Socket + SM adapter




QFN SM adapter




QFP SM adapter



Spring pin socket +
Thru hole adapter +
Surface mount adapter



Thru hole adapter +
Surface mount adapter

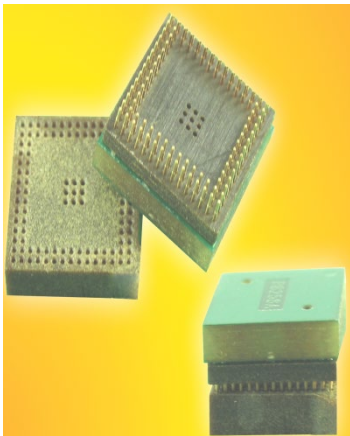


0.5mm pitch
Pluggable adapter pair


Features	Benefits
Pluggable interface	Easy insertion and extraction for device swap
FR4 & Gold plated contacts	High temperature applications
Small adapter footprint	Easy to place inductors, capacitors, resistors, etc for tuning and increasing bandwidth. Ideal for IC prototype and system testing and field upgradeable system designs
Conductive filled via	Excellent thermal dissipation and high current applications
Optimized plated thru hole with filled via	Low inductance and high speed applications
Edge castellation (QFN)	Easy manual assembly
Standard Solder (BGA)	Easy assembly (industry standard reflow profile)

Capabilities

- 0.5mm to 1.27mm pitch
- 2x3mm to 50x50mm device
- BGA, LGA, QFN, QFP, SOIC
- 2000 pin count
- Lead free options
- Easy pluggable module
- Custom height extension

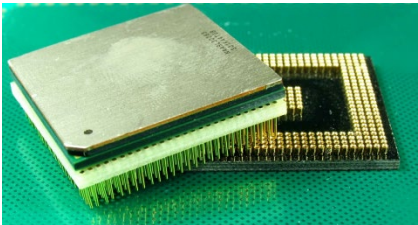

Pluggable adapter pair
with soldered device



Thru hole adapter

Continuous improvement

Proven Capability

Development

20 Years

Custom Capability

- Custom socket designs in 2 days
- Match customer's PCB footprint
- Custom socket manufacturing in 10 days
- Multiple contactor technologies
- Heat sink simulation and design
- Contactor signal integrity simulation
- In-house automated optical inspection
- In-house machining
- Quick-turn production

