

Top View

GHz Socket - Direct mount, solderless

Features

-Recommended torque = 0.38 in lb.

- Directly mounts to target PCB (needs tooling holes) with hardware.
- High speed, reliable Elastomer connection
- Minimum real estate required
- Compression plate distributes forces evenly
- Easily removable swivel socket lid



Socket Lid: Black anodized Aluminum. Thickness = 2.5mm.



Socket base: Black anodized Aluminum. Thickness = 5mm.



Compression Plate: Ceramic Filled Peek



Compression screw: Clear anodized Aluminum. Thickness = 5mm, Hex socket = 5mm.



Elastomer: 20 micron dia gold plated brass filaments arranged symmetrically in a silicone

el with ong.


	<u> </u>				·	rubber (63.5 degree angle). Thickness = 0.5 mm.
		1 <		<u></u>		Elastomer Guide: Non-clad FR4.
			>	\searrow	9	\triangle Thickness = 0.475mm.
		$\neg \setminus <$	>	₹ 1		^
	<u>Assembled</u>	\	>	\leq		<u>√7</u> Lead Guide: Kapton Film
	8.25mm +		>	>		^ 2 + + + + + + + + + + + + + + + + + +
	IC thickness			> / \		Socket base screw: Socket head cap, alloy steel value black oxide finish, 0-80 fine thread, 9.525mm lon
					8 /12	
	6				7	Socket lid screw: Socket head cap, alloy steel with black oxide finish, 0-80 fine thread, 4.76mm long
			A			black Oxide IIIIsti, 0-00 fille tillead , 4.70filli folig
						Nylon washer
Side Viev	/ 11					<u> </u>
(Section A					\	/11\ Hex nut
	<u>/10\</u>	11	Customer's IC	5		12 IC Guide: Ultem 1000
			oustorner's to	<u> </u>	Customer's Target PCB	/ 12 10 Guide. Oilein 1000

	SG-SOIC-3001 Drawing	Status: Released	Scale:	-	Rev: A
	© 2012 IRONWOOD ELECTRONICS, INC.	Drawing: E Smolentseva		Date: 3/3/10	
	Tele: (800) 404-0204 www.ironwoodelectronics.com	File: SG-SOIC-3001 Dwg.mcd		Modified:	

All tolerances: ±0.125mm (unless stated otherwise). Materials and specifications are subject to change without notice.

Recommended PCB Layout

Top View

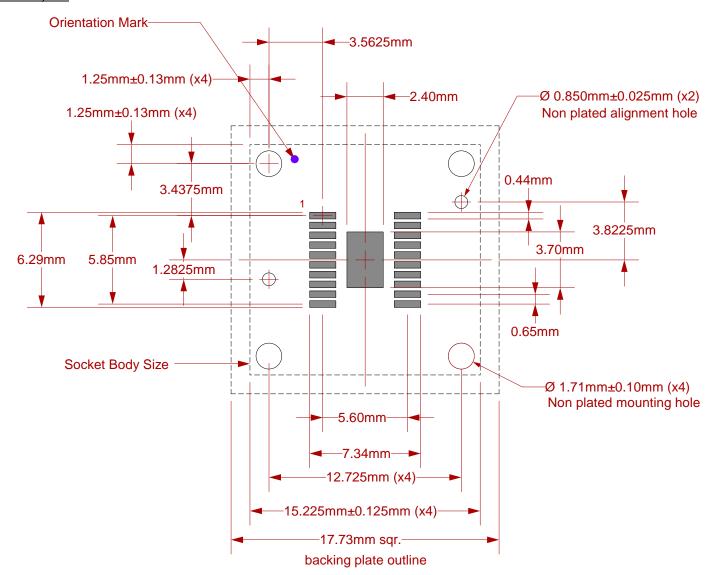

Target PCB Recommendations

Total thickness: 1.45mm min.


Plating: Immersion Gold, Immersion Silver, or Solder finish.

PCB Pad height: Same or higher than solder mask

Recommended PCB Layout Tolerances: ±0.025mm [±0.001"] unless stated otherwise.

SG-SOIC-3001 Drawing	Status: Released	Scale:	-	Rev: A
© 2012 IRONWOOD ELECTRONICS, INC.	Drawing: E Smolentseva		Date: 3/3/10	
Tele: (800) 404-0204 www.ironwoodelectronics.com	File: SG-SOIC-3001 Dwg.mcd		Modified:	

Compatible IC Spec.

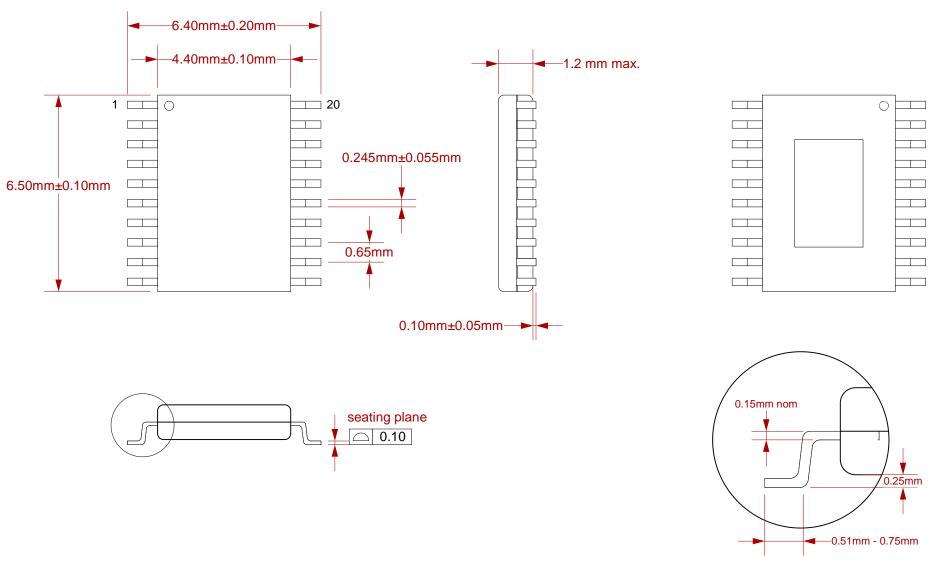

SG-SOIC-3001 Drawing	Status: Released	Scale:	-	Rev: A
© 2012 IRONWOOD ELECTRONICS, INC.	Drawing: E Smolentseva		Date: 3/3/10	
Tele: (800) 404-0204 www.ironwoodelectronics.com	File: SG-SOIC-3001 Dwg.mcd		Modified:	

PAGE 3 of 3